Overview

HP recommends Windows Vista™ Business

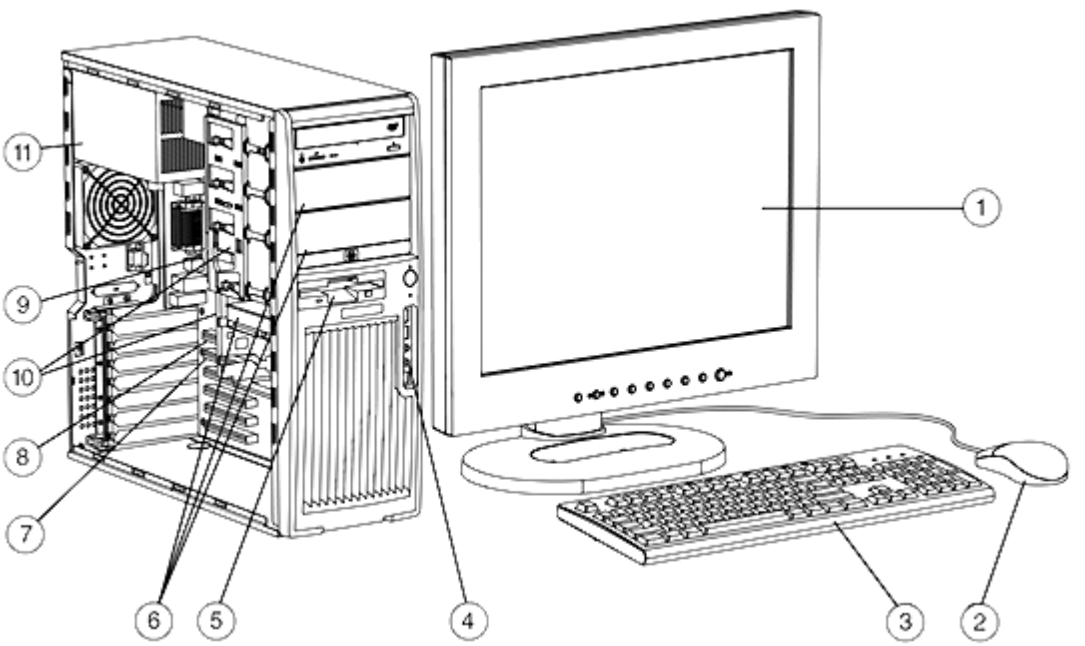

1. Monitor (sold separately)
2. 2-Button Scroll Mouse
3. 2004 Standard Keyboard
4. Front IO: 2 USB 2.0, IEEE-1394 (requires optional PCI card to enable), headphone and microphone
5. One 3.5" external bay for optional diskette drive or other 3.5" device
6. Three 5.25" external bays (3rd external is not full depth), and two 3.5" internal bays
7. 3 PCI slots, 1 PCI Express x1 slot, 1 PCI Express x8 slot (with x4 functionality)
8. 1 PCI Express x16 Graphics slot
9. Rear IO: 6 USB 2.0, 1 standard serial port, 1 optional serial port, 1 parallel port, PS/2 keyboard, PS/2 mouse, RJ-45, audio in, audio out, mic in
10. Intel® Pentium® 4 processor with Hyper-Threading Technology and EM64T capability
11. 460 watt (continuous) power supply

Overview

At A Glance

- Choice of operating systems:
  Genuine Windows XP Professional (32-bit),
  Genuine Windows XP Professional x64 Edition,
  Red Hat Enterprise WS4
  HP Installer Kit for Linux (see http://www.hp.com/workstations/software/linux/ for details)
  Tested on Microsoft Windows 2000 Professional SP4
- Intel Pentium 4 processor with Extended Memory 64 Technology (EM64T) and,
  - Hyper-Threading Technology
  - Virtualization Technology (672 processor only)
- Intel Pentium D processor with Extended Memory 64 Technology (EM64T)
- Intel 955X Express chipset
- Integrated HP Gbit LAN by Broadcom
- 800 MHz processor front side bus support
- Convertible and tool-less minitower chassis
- 3 PCI Express slots/3 PCI slots
- Dual channel DDR2 memory at 533 or 667 MHz
- Four channel SATA Controller with RAID* 0, 1, 10, or 5
- Realtek integrated high definition audio with internal speaker
- Pre-loaded Manageability tools
- Protected by HP Services, including a 3-3-3 standard warranty. Terms and conditions vary by country. Certain restrictions and exclusions apply.

* **NOTE:** Hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent, functionality and performance. It is a good alternative to hardware-based RAID. Please visit http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf for RAID capabilities with Linux.

Standard Features - Custom Components

Processor and Speed – One of the following	**All processors feature Extended Memory 64 Technology. All Pentium 4 processors feature Hyper-Threading Technology**
	Intel Pentium 4 processor 521 supporting Hyper-Threading Technology (2.80 GHz/1 MB, 800 FSB, Single Core)
	Intel Pentium 4 processor 630 supporting Hyper-Threading Technology (3.00 GHz/2 MB, 800 FSB, Single Core)
	Intel Pentium 4 processor 640 supporting Hyper-Threading Technology (3.20 GHz/2 MB, 800 FSB, Single Core)
	Intel Pentium 4 processor 650 supporting Hyper-Threading Technology (3.40 GHz/2 MB, 800 FSB, Single Core)
	Intel Pentium 4 processor 660 supporting Hyper-Threading Technology (3.60 GHz/2 MB, 800 FSB, Single Core)
	Intel Pentium 4 processor 672 supporting Hyper-Threading Technology and Virtualization Technology (3.80 GHz/2 MB, 800 FSB, Single Core)
	Intel Pentium D processor 940 (3.20 GHz/2 MB, 800 FSB, Dual Core)
	Intel Pentium D processor 950 (3.40 GHz/2 MB, 800 FSB, Dual Core)
	Intel Pentium D processor 960 (3.60 GHz/2 MB, 800 FSB, Dual Core)
	NOTE: Hyper-Threading (HT) Technology requires a computer system with an Intel Pentium processor supporting HT Technology and an HT Technology enabled chipset, BIOS, and operating system. Performance will vary depending on the specific hardware and software you use. See http://www.intel.com/info/hyperthreading/ for more information including details on which processors support HT Technology.
Operating System – One of the following	Genuine Windows XP Professional SP2 (32-bit)
	Genuine Windows XP Professional x64 Edition (64-bit)
	Red Hat Enterprise Linux Workstation 4 Update 3 (32 & 64-bit)
	HP Installer CD for Red Hat Linux WS 3 and WS 4 Box Set (includes drivers for 32-bit and 64-bit) See http://www.hp.com/workstations/software/linux/ Click on "Hardware support matrix" under "Related links" for details.
	NOTE: Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix (http://www.hp.com/support/linux_hardware_matrix) for details, and to the Linux User Manual (http://www.hp.com/support/linux_user_manual) for tips on user-enablement of the IEEE 1394 Card.

Standard Features - Custom Components

1st Hard Disk Drive – One of the following		**Windows XP**	**Red Hat Linux**
	Serial ATA Drives		
	80 GB SATA 3.0-Gb/s 7200 rpm drive	32-Bit, 64-Bit	WS3, WS4
	160 GB SATA 3.0-Gb/s 7200 rpm drive with Native Command Queuing	32-Bit, 64-Bit	WS3, WS4
	250 GB SATA 3.0-Gb/s 7200 rpm drive	32-Bit, 64-Bit	WS3, WS4
	500 GB SATA 3.0-Gb/s 7200 rpm drive with Native Command Queuing	32-Bit, 64-Bit	WS3, WS4
	Serial ATA 1.5Gb/s Hard Drive		
	74 GB SATA 1.5-Gb/s 10K rpm drive	32-Bit, 64-Bit	WS3, WS4
	Ultra320 SCSI Drives		
	73 GB Ultra320 SCSI 10K rpm drive	32-Bit, 64-Bit	WS3, WS4
	146 GB Ultra320 SCSI 10K rpm drive	32-Bit, 64-Bit	WS3, WS4
	300 GB Ultra320 SCSI 10K rpm drive	32-Bit, 64-Bit	WS3, WS4
	36 GB Ultra320 SCSI 15K rpm drive	32-Bit, 64-Bit	WS3, WS4
	73 GB Ultra320 SCSI 15K rpm drive	32-Bit, 64-Bit	WS3, WS4

2nd Hard Disk Drive – One of the following	**Serial ATA 3Gb/s Hard Drives**	**Windows XP**	**Red Hat Linux**
	2nd Hard Drive, 80 GB SATA 3.0-Gb/s 7200 rpm drive	32-Bit, 64-Bit	WS3, WS4
	2nd Hard Drive, 160 GB SATA 3.0-Gb/s 7200 rpm drive with Native Command Queuing	32-Bit, 64-Bit	WS3, WS4
	2nd Hard Drive, 250 GB SATA 3.0-Gb/s 7200 rpm drive	32-Bit, 64-Bit	WS3, WS4
	2nd Hard Drive, 500 GB SATA 3.0-Gb/s 7200 rpm drive with Native Command Queuing	32-Bit, 64-Bit	WS3, WS4
	Serial ATA 1.5Gb/s Hard Drive		
	2nd Hard Drive, 74 GB SATA 1.5-Gb/s 10K rpm drive	32-Bit, 64-Bit	WS3, WS4
	Ultra320 SCSI Drives		
	2nd Hard Drive, 73 GB Ultra320 SCSI 10K rpm drive	32-Bit, 64-Bit	WS3, WS4
	2nd Hard Drive, 146 GB Ultra320 SCSI 10K rpm drive	32-Bit, 64-Bit	WS3, WS4
	2nd Hard Drive, 300 GB Ultra320 SCSI 10K rpm drive	32-Bit, 64-Bit	WS3, WS4
	2nd Hard Drive, 36 GB Ultra320 SCSI 15K rpm drive	32-Bit, 64-Bit	WS3, WS4
	2nd Hard Drive, 73 GB Ultra320 SCSI 15K rpm drive	32-Bit, 64-Bit	WS3, WS4

Standard Features - Custom Components

3rd Hard Disk Drive - One of the following	**Serial ATA 3Gb/s Hard Drives**	**Windows XP**	**Red Hat Linux**
	3rd Hard Drive, 80 GB SATA 3.0-Gb/s 7200 rpm drive	32-Bit	WS3, WS4
	3rd Hard Drive, 160 GB SATA 3.0-Gb/s 7200 rpm drive with Native Command Queuing	32-Bit	WS3, WS4
	3rd Hard Drive, 250 GB SATA 3.0-Gb/s 7200 rpm drive	32-Bit	WS3, WS4
	3rd Hard Drive, 500 GB SATA 3.0-Gb/s 7200 rpm drive with Native Command Queuing	32-Bit	WS3, WS4
	Serial ATA 1.5Gb/s Hard Drive		
	3rd Hard Drive, 74 GB SATA 1.5-Gb/s 10K rpm drive	32-Bit	WS3, WS4
	Ultra320 SCSI Drives		
	3rd Hard Drive, 73 GB Ultra320 SCSI 10K rpm drive	32-Bit, 64-Bit	WS3, WS4
	3rd Hard Drive, 146 GB Ultra320 SCSI 10K rpm drive	32-Bit, 64-Bit	WS3, WS4
	3rd Hard Drive, 300 GB Ultra320 SCSI 10K rpm drive	32-Bit, 64-Bit	WS3, WS4
	3rd Hard Drive, 36 GB Ultra320 SCSI 15K rpm drive	32-Bit, 64-Bit	WS3, WS4
	3rd Hard Drive, 73 GB Ultra320 SCSI 15K rpm drive	32-Bit, 64-Bit	WS3, WS4

Drive controllers		**Windows XP**	**Red Hat Linux**
	Integrated 4 channel Serial ATA 3Gb/s controller with NCQ and RAID* 0, 1, 10, 5 functionality	32-Bit	WS3, WS4
	Optional U320 SCSI Controller - LSI 20320AR RAID 0,1 (required with SCSI HDDs)	32-Bit	WS3, WS4

* **NOTE:** Hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent, functionality and performance. It is a good alternative to hardware-based RAID. Please visit http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf for RAID capabilities with Linux.

Factory Integrated RAID		**Windows XP**	**Red Hat Linux**
	RAID 0 Configuration - Striped Array	32-Bit	
	RAID 1 Configuration	32-Bit	

NOTE: Requires 2 identical hard drives (speeds, capacity, interface) SATA RAID 0, 1 and SCSI RAID 0, 1 available as options.

Standard Features - Custom Components

Memory – One of the following		Windows XP	Red Hat Linux
	ECC RAM		
	512 MB PC2-4300 (DDR2 533 MHz) ECC (2 x 256 MB)	32-Bit, 64-Bit	WS3, WS4
	512 MB DDR2 PC2-5300 (667 MHz) ECC (2 x 256 MB)	32-Bit, 64-Bit	WS3, WS4
	1 GB PC2-4300 (DDR2 533 MHz) ECC (2 x 512 MB)	32-Bit, 64-Bit	WS3, WS4
	1 GB PC2-5300 (DDR2 667 MHz) ECC (2 x 512 MB)	32-Bit, 64-Bit	WS3, WS4
	1.5 GB PC2-4300 (DDR2 533 MHz) ECC (2 x 256 MB + 2 x 512 MB)	32-Bit, 64-Bit	WS3, WS4
	2 GB PC2-4300 (DDR2 533 MHz) ECC (4 x 512 MB)	32-Bit, 64-Bit	WS3, WS4
	2 GB PC2-5300 (DDR2 667 MHz) ECC (2 x 1 GB)	32-Bit, 64-Bit	WS3, WS4
	3 GB PC2-5300 (DDR2 667 MHz) ECC (2 x 512 + 2 x 1 GB)	32-Bit, 64-Bit	WS3, WS4
	4 GB PC2-4300 (DDR2 533 MHz) ECC (2 x 2 GB)	32-Bit, 64-Bit	WS3, WS4
	4 GB PC2-5300 (DDR2 667 MHz) ECC (4 x 1 GB)	32-Bit, 64-Bit	WS3, WS4
	8 GB PC2-4300 (DDR2 533 MHz) ECC (4 x 2 GB)	32-Bit, 64-Bit	WS3, WS4
	Non-ECC RAM		
	256 MB PC2-4300 (DDR2 533 MHz) non-ECC (1 x 256 MB)	32-Bit, 64-Bit	WS3, WS4
	512 MB PC2-4300 (DDR2 533 MHz) non-ECC (2 x 256 MB)	32-Bit, 64-Bit	WS3, WS4
	1 GB PC2-4300 (DDR2 533 MHz) non-ECC (4 x 256 MB)	32-Bit, 64-Bit	WS3, WS4
	1 GB PC2-4300 (DDR2 533 MHz) non-ECC (2 x 512 MB)	32-Bit, 64-Bit	WS3, WS4

NOTE: Do not mix ECC and non-ECC memory. The system will not boot if ECC and non-ECC DIMMs are mixed. Only unbuffered DDR2 DIMMs are supported. All DIMMs must be either x8 or x16 width.

Removable Storage		Windows XP	Red Hat Linux
	1.44 MB Diskette Drive	32-Bit, 64-Bit	WS3, WS4
	48X CD-ROM Drive	32-Bit, 64-Bit	WS3, WS4
	48X CD-RW Drive	32-Bit, 64-Bit	WS3, WS4
	16X DVD-ROM with +R Read	32-Bit, 64-Bit	WS3, WS4
	48X Combo CD-RW/DVD-ROM Drive	32-Bit, 64-Bit	WS3, WS4
	16X DVD+/-RW, Dual-Layer, LightScribe*	32-Bit, 64-Bit	WS3, WS4*
	*__NOTE:__ LightScribe software works with Windows 32-Bit only.		

2nd Removable Storage		Windows XP	Red Hat Linux
	48X CD-RW Drive	32-Bit, 64-Bit	WS3, WS4
	16X DVD-ROM with +R Read	32-Bit, 64-Bit	WS3, WS4
	48X Combo CD-RW/DVD-ROM Drive	32-Bit, 64-Bit	WS3, WS4
	16X DVD+/-RW, Dual-Layer, LightScribe*	32-Bit	WS3, WS4*
	***NOTE**: LightScribe software works with Windows only.		

Standard Features - Custom Components

Keyboard** One of the following		**Windows XP**	**Red Hat Linux**
	PS/2 Standard Keyboard	32-Bit, 64-Bit	WS3, WS4
	USB Standard Keyboard	32-Bit, 64-Bit	WS3, WS4

****NOTE:** Not supported in configurations which include both USB mouse and Linux nor PS/2 mouse and Linux.

Mouse – One of the following		**Windows XP**	**Red Hat Linux**
	PS/2 2-Button Scroll Mouse	32-Bit, 64-Bit	WS3, WS4
	USB 2-Button Optical Scroll Mouse	32-Bit, 64-Bit	WS3, WS4
	USB 3-Button Optical Mouse	32-Bit, 64-Bit	WS3, WS4

Audio		**Windows XP**	**Red Hat Linux**
	Integrated High Definition audio with internal speaker	32-Bit	WS3, WS4
	SoundBlaster X-Fi XtremeMusic Audio Card	32-Bit, 64-Bit	
	HP Optical Drive Internal Audio Cable (Supported only when an optical drive is ordered. Not for use with X-Fi audio card)		WS3, WS4

NIC		**Windows XP**	**Red Hat Linux**
	Broadcom 5751 Netxtreme™ Gigabit PCIe NIC	32-Bit, 64-Bit	WS3, WS4

Graphics		**Windows XP**	**Red Hat Linux**
	NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express (128 MB with TC)*	32-Bit, 64-Bit	WS3, WS4
	ATI FireGL V3100 PCI Express (128 MB)	32-Bit	
	NVIDIA Quadro FX 540 PCI Express (128 MB)	32-Bit, 64-Bit	WS3, WS4
	NVIDIA Quadro FX 1400 PCI Express (128 MB)	32-Bit	
	ATI FireGL V5100 PCI Express (128 MB)	32-Bit, 64-Bit	
	NVIDIA Quadro NVS 440 PCI Express (256 MB)	32-Bit, 64-Bit	
	NVIDIA Quadro FX3450 PCI Express (256 MB)	32-Bit, 64-Bit	WS3, WS4
	NVIDIA Quadro FX4500 PCI Express (512 MB)	32-Bit, 64-Bit	WS3, WS4

NOTE:
* Two NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express cards may be used together.

Miscellaneous		**Windows XP**	**Red Hat Linux**
	Solenoid lock and hood sensor	32-Bit, 64-Bit	WS3, WS4
	HP FireWire IEEE 1394a 3-Port PCI Card	32-Bit	
	Configure minitower in desktop orientation	32-Bit, 64-Bit	WS3, WS4
	Energy Star Settings	32-Bit, 64-Bit	
	HP Workstations Mouse Pad	N/A	N/A

Standard Features - Custom Components

Software		Windows XP	Red Hat Linux
	Microsoft Windows XP Professional*	32-Bit	
	OR Microsoft Windows XP Professional x64 Edition*	64-Bit	
	Red Hat Enterprise Linux WS 3, 64-bit OS		WS3, WS4
	HP Red Hat Linux Installer Kit (includes drivers for both 32-bit & 64-bit OS versions on xw8200, xw6200, xw4200, xw4300)		WS3, WS4
	Alert Standard Format specification*	32-Bit, 64-Bit	
	HP ProtectTools Software	32-Bit	
	Symantec Norton AntiVirus 2005 (optional preinstall, Microsoft Windows XP Professional only)*	32-Bit	
	Computer Associates® eTrust™ 64-bit AntiVirus (optional preinstall, Microsoft Windows XP Professional x64 Edition only)*	64-Bit	
	HP Performance Tuning Framework*	32-Bit, 64-Bit	
	Computer Associates eTrust 64-bit Anti-Virus Software	64-Bit	
	Altiris Recovery* (optional download)	32-Bit, 64-Bit	
	HP ProtectTools Security Manager* (optional download)	32-Bit, 64-Bit	
	HP Client Manager Software v6.0* (optional download)	32-Bit, 64-Bit	
	Microsoft Office 2003 Small Business Edition (optional preinstall - Microsoft Windows XP Professional only)	32-Bit	
	Microsoft Office 2003 Basic (optional preinstall - Microsoft Windows XP Professional only)	32-Bit	
	Microsoft Office 2003 Professional	32-Bit, 64-Bit	
	CD/DVD software dependent on optical drive choices	32-Bit	

* **NOTE:** Not available with Linux Operating System.

Standard Features - Specs

Operating System (choice)	Genuine Windows XP Professional (32-bit) Genuine Windows XP Professional x64 Edition Red Hat Enterprise Linux Workstation 4 Update 3. HP Installer Kit for Linux 1 (includes drivers for both 32-bit & 64-bit OS versions) (Tested and supported on Microsoft Windows 2000 Professional SP4. See HP White Paper at: http://www.hp.com/workstations/white_papers/docs/xw4300_win2k_whitepaper_sept2005.pdf)
Form factor	Minitower
Color	Carbonite/Alloy metallic
Convertibility	Yes. 5.25" drives rotate for Minitower or Desktop orientation.
System Board Form Factor	ATX (9.6 x 12 in)
Processor	Single Intel Pentium 4 processors with Hyper-Threading Technology or Pentium D processors
CPU Bus Speed Supported	1066 and 800 MHz FSB
Standard L2 Cache	1 or 2 MB L2 cache, depending on specific processor
Chipset	Intel 955X North bridge/ICH7R South bridge
Memory Expansion Slots	4 DIMMs
Memory Type Supported	DDR2 (ECC and non-ECC)
Memory Speed Supported	DDR2 SDRAM PC2-4300 (533 MHz) ECC DDR2 SDRAM PC2-5300 (667 MHz) ECC DDR2 SDRAM PC2-4300 (533 MHz) non-ECC
Maximum Memory	8 GB (4 DIMM slots)
Network controller	Integrated Broadcom 5752 10/100/1000 for HP (PCI Express interface)
Audio	Integrated High Definition digital audio with stereo microphone
PCI slots	3 PCI slots (full-height, full-length) 1 PCI Express x8 slot (x4 functionality) 1 PCI Express x1 slot 1 PCI Express x16 graphics slot
AGP slot	None
Bays	Total Bays = 6
Internal Bays	• Two 3.5 inch SATA Hard Drive
External Bays	• Three 5.25 inch bays • One 3.5 inch bay for optional floppy drive
Parallel Port	1
Serial Port	1 standard, 2nd is optional
Front I/O	2 USB 2.0, IEEE-1394 (requires optional PCI card to function), headphone and microphone. **NOTE:** Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394 card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix (http://www.hp.com/support/linux_hardware_matrix) for details, and to the Linux User Manual (http://www.hp.com/support/linux_user_manual) for tips on user-enablement of the IEEE 1394 Card.
Rear I/O	6 USB 2.0, 1 standard serial port, 1 optional serial port, parallel port, PS/2 keyboard, PS/2 mouse, RJ-45, audio in, audio out, mic in (audio/mic ports can be made function autosensing and interchangeably retaskable by downloading a driver)
USB Keyboard	Optional
USB Mouse	Optional
PS/2 Keyboard	1
PS/2 Mouse	1

Standard Features - Specs

Chassis Dimensions (H x W x D)	17.7 x 6.6 x 17.9 in (45.0 x 16.8 x 45.6 cm) 6.6 x 17.7 x 17.9 in (16.8 x 45.0 x 45.6 cm)	
Weight	Typical configuration – 35 lb (15.88 kg)	
Shipping weight	Typical configuration – 44 lb (19.96 kg)	
Temperature	Operating	40° to 95°F (5° to 35°C)
	Non-operating	-40° to 140°F (-40° to 60°C)
Humidity	Operating	8% to 85%
	Non-operating	8% to 90%
Maximum Altitude (nonpressurized)	Operating	10,000 ft (3,000 m)
	Non-operating	30,000 ft (9,100 m)
Power Supply	460 watts (continuous) Auto-ranging	
Interfaces Supported	1 SATA 3 Gb/s interface (4 Serial-ATA connectors), 1 EIDE interface for optical drives	
Hard Drive Controller (PCI) Supported	Optional Ultra320 or Ultra320 RAID (Hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent, functionality and performance. It is a good alternative to hardware-based RAID. Please visit http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf for RAID capabilities with Linux.)	
On-board RAID supported?	Yes	

Standard Features - Preconfigures Global Models

xw4300X / PJ3.80 / C74 / J1.0 / Xv / p EM478AW#ABA	**Processor**	Intel Pentium 4 processor 670 supporting Hyper-Threading Technology (3.80 GHz/2 MB, 800 FSB, Single Core)
	OS	Genuine Windows XP Professional
	Cache Memory	2 MB L2
	Memory	1 GB (2x512) DDR2-533 ECC Registered
	Optical Drive	48X DVD-ROM/CD-RW Combo Drive
	Hard Drive	74-GB SATA 1.5-GB/S 10k rpm (1st)
	Graphics	None
	Mouse	Optical Scroll mouse (USB)
	Other	Includes Standard PS/2 Keyboard

xw4300X / PY3.80 / C74 / J1.0 / Xv / p EP810AW #ABA	**Processor**	Intel Pentium 4 processor 672 supporting Hyper-Threading Technology and Virtualization Technology (3.80 GHz/2 MB, 800 FSB, Single Core)
	OS	Genuine Windows XP Professional
	Cache Memory	2 MB L2
	Memory	1 GB (2x512) DDR2-533 ECC Registered
	Optical Drive	48X DVD-ROM/CD-RW Combo Drive
	Hard Drive	74-GB SATA 1.5-GB/S 10k rpm (1st)
	Graphics	None
	Mouse	Optical Scroll mouse (USB)
	Other	Includes Standard PS/2 Keyboard

Standard Features - Preconfigured Regional Models

xw4300X/PJ3.00/F160/ J1.0/FGV3v/p	**Processor**	Intel Pentium 4 processor 630 supporting Hyper-Threading Technology (3.00 GHz/2 MB, 800 FSB, Single Core)
	OS	Genuine Windows XP Professional (32-bit)
	Cache Memory	2 MB
	Memory	1 GB (2x512) DDR2-533 ECC RAM
	Optical Drive	HP 48X DVD-ROM/CDRW (1st) Combo Drive
	Hard Drive	HP 160GB SATA/300 7200rpm with Native Command Queuing (1st)
	Graphics	ATI FireGL V3100 128MB PCIe Graphics
	Mouse	HP USB Optical Scroll Mouse
	Other	Includes HP PS/2 Standard Keyboard (no floppy disk option)

xw4300X/PJ3.00/F160/J1.0/FGV3v/p Country Code Key

N. America	PZ002UA#ABA
Fr. Canadian	PZ002UA#ABC
L. America	PZ002UA#ABM

---

xw4300X/PJ3.00/F160/ K512/Xv/p	**Processor**	Intel Pentium 4 processor 630 supporting Hyper-Threading Technology (3.00 GHz/2 MB, 800 FSB, Single Core)
	OS	Genuine Windows XP Professional (32-bit)
	Cache Memory	2 MB
	Memory	512 MB (2x256) DDR2-667 ECC RAM
	Optical Drive	HP 48X DVD-ROM/CDRW (1st) Combo Drive
	Hard Drive	HP 160GB SATA/300 7200rpm with Native Command Queuing (1st)
	Graphics	Not included in base configuration – Please Choose a graphics card option below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI) NVIDIA Quadro NVS 280 PCI Express (64 MB, VGA & DVI) NVIDIA Quadro NVS 285 PCI Express (128 MB, VGA & DVI) NVIDIA Quadro NVS 400 PCI (64 MB, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3450 PCI Express (256 MB) NVIDIA Quadro FX 4500 PCI Express (512 MB) **NOTE:** Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP USB Optical Scroll Mouse
	Other	Includes HP PS/2 Standard Keyboard (no floppy disk option)

Standard Features - Preconfigured Regional Models

xw4300X/PJ3.00/F160/K512/Xv/p Country Code Key

N. America	PZ008UA#ABA
Fr. Canadian	PZ008UA#ABC
L. America	PZ008UA#ABM

xw4300X/PV3.20/C74/ J1/Xd/p	**Processor**	Intel Pentium D processor 840 (3.20 GHz/1 MB, 800 FSB, Dual Core)
	OS	Genuine Windows XP Professional (32-bit)
	Cache Memory	2 MB (Dual Core)
	Memory	1GB (2x512) DDR2-533 ECC RAM
	Optical Drive	HP 16X DVD-ROM (1st) Drive
	Hard Drive	74-GB SATA 1.5-GB/S 10k rpm (1st)
	Graphics	Not included in base configuration – Please Choose a graphics card option below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI) NVIDIA Quadro NVS 280 PCI Express (64 MB, VGA & DVI) NVIDIA Quadro NVS 285 PCI Express (128 MB, VGA & DVI) NVIDIA Quadro NVS 400 PCI (64 MB, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3450 PCI Express (256 MB) NVIDIA Quadro FX 4500 PCI Express (512 MB) **NOTE:** Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP USB Optical Scroll Mouse
	Other	Includes HP PS/2 Standard Keyboard (no floppy disk option)

xw4300X/PV3.20/C74/J1/Xd/p Country Code Key

N. America	PY957UA#ABA
Fr. Canadian	PY957UA#ABC
L. America	PY957UA#ABM

Standard Features - Preconfigured Regional Models

xw4300X/PJ3.20/F160/ J512/FX54/v/p	**Processor**	Intel Pentium 4 processor 640 supporting Hyper-Threading Technology (3.20 GHz/2 MB, 800 FSB, Single Core)
	OS	Genuine Windows XP Professional (32-bit)
	Cache Memory	2 MB
	Memory	512 MB (2x256) DDR2-533 ECC RAM
	Optical Drive	HP 48X DVD-ROM/CDRW (1st) Combo Drive
	Hard Drive	HP 160GB SATA/300 7200rpm with Native Command Queuing (1st)
	Graphics	NVIDIA Quadro FX540 128MB PCIe Graphics
	Mouse	HP USB Optical Scroll Mouse
	Other	Includes HP PS/2 Standard Keyboard (no floppy disk option)

xw4300X/PJ3.20/F160/J512/FX54/v/p Country Code Key

N. America	PY999UA#ABA
Fr. Canadian	PY999UA#ABC
L. America	PY999UA#ABM

xw4300X/PJ3.40/F160/ J1/FX14/v/p	**Processor**	Intel Pentium 4 processor 650 supporting Hyper-Threading Technology (3.40 GHz/2 MB, 800 FSB, Single Core)
	OS	Genuine Windows XP Professional (32-bit)
	Cache Memory	2 MB
	Memory	1 GB (2x512) DDR2-533 ECC RAM
	Optical Drive	HP 48X DVD-ROM/CDRW (1st) Combo Drive
	Hard Drive	HP 160GB SATA/300 7200 rpm with Native Command Queuing (1st)
	Graphics	NVIDIA Quadro FX1400 128MB PCIe Graphics
	Mouse	HP USB Optical Scroll Mouse
	Other	Includes HP PS/2 Standard Keyboard (no floppy disk option)

xw4300X/PJ3.40/F160/J1/FX14/v/p Country Code Key

N. America	PZ001UA#ABA
Fr. Canadian	PZ001UA#ABC
L. America	PZ001UA#ABM

Standard Features - Preconfigured Regional Models

xw4300X/PJ3.60/F160/ J1.0/Xd/p	**Processor**	Intel Pentium 4 processor 660 supporting Hyper-Threading Technology (3.60 GHz/2 MB, 800 FSB, Single Core)
	OS	Genuine Windows XP Professional (32-bit)
	Cache Memory	2 MB
	Memory	1 GB (2x512) DDR2-533 ECC RAM
	Optical Drive	HP 16X DVD-ROM (1st) Drive
	Hard Drive	HP 160GB SATA/300 7200rpm (1st)
	Graphics	Not included in base configuration – Please Choose a graphics card option below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI) NVIDIA Quadro NVS 280 PCI Express (64 MB, VGA & DVI) NVIDIA Quadro NVS 285 PCI Express (128 MB, VGA & DVI) NVIDIA Quadro NVS 400 PCI (64 MB, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3450 PCI Express (256 MB) NVIDIA Quadro FX 4500 PCI Express (512 MB) **NOTE:** Please see Part Numbers in After market options/Standalone accessories section.
	Mouse	HP USB Optical Scroll Mouse
	Other	Includes HP PS/2 Standard Keyboard (no floppy disk option)

xw4300X/PJ3.60/F160/J1.0/Xd/p Country Code Key	
N. America	PZ003UA#ABA
Fr. Canadian	PZ003UA#ABC
L. America	PZ003UA#ABM

xw4300/X/PJ3.80/S73/ J1/Xv/p	**Processor**	Intel Pentium 4 processor 670 supporting Hyper-Threading Technology (3.80 GHz/2 MB, 800 FSB, Single Core)
	OS	Genuine Windows XP Professional (32-bit)
	Cache Memory	2 MB
	Memory	1GB (2x512) DDR2-533 ECC RAM
	Optical Drive	HP 48X DVD-ROM/CDRW (1st) Combo Drive
	Hard Drive	HP 73GB U320 SCSI 10,000rpm (1st)

Standard Features - Preconfigured Regional Models

Graphics	Not included in base configuration – Please Choose a graphics card option below: NVIDIA Quadro NVS 280 PCI (64 MB, VGA & DVI) NVIDIA Quadro NVS 280 PCI Express (64 MB, VGA & DVI) NVIDIA Quadro NVS 285 PCI Express (128 MB, VGA & DVI) NVIDIA Quadro NVS 400 PCI (64 MB, VGA & DVI) ATI FireGL V3100 PCI Express (128 MB) NVIDIA Quadro FX 540 PCI Express (128 MB) NVIDIA Quadro FX 1400 PCI Express (128 MB) ATI FireGL V5100 PCI Express (128 MB) NVIDIA Quadro FX 3450 PCI Express (256 MB) NVIDIA Quadro FX 4500 PCI Express (512 MB) **NOTE:** Please see Part Numbers in After market options/Standalone accessories section.
Mouse	HP USB Optical Scroll Mouse
Other	Includes HP PS/2 Standard Keyboard (no floppy disk option)

xw4300/X/PJ3.80/S73/J1/Xv/p Country Code Key

N. America	PY959UA#ABA
Fr. Canadian	PY959UA#ABC
L. America	PY959UA#ABM

After-Market Options

Graphics		Windows XP	Red Hat Linux	Part Number
	Multi display solutions			
	NVIDIA Quadro NVS 280 PCI Graphics Card (64 MB, VGA & DVI)	32-Bit, 64-Bit	WS3, WS4	AA932A
	NVIDIA Quadro NVS 285 with TurboCache Technology PCI Express Graphics Card (128 MB, TC)	32-Bit, 64-Bit	WS3, WS4	EE061AA
	NVIDIA DVI Dual-head Connector Cable for NVS cards	32-Bit, 64-Bit	WS3, WS4	DL139A
	ATI FireGL V3100 (128 MB) - PCIe	32-Bit		PE949A
	NVIDIA Quadro FX 540 (128 MB)	32-Bit, 64-Bit	WS3, WS4	PH791A
	NVIDIA Quadro FX 1400 (128 MB)) - PCIe	32-Bit		PM979A
	ATI FireGL V5100 (128 MB) - PCIe	32-Bit		PB330A
	NVIDIA Quadro NVS 440 PCI Express Graphics Card (256 MB)	32-Bit, 64-Bit		PT453A
	NVIDIA Quadro FX 3450 (256 MB) - PCIe	32-Bit, 64-Bit	WS3, WS4	PY640AA
	NVIDIA Quadro FX 4500 (512 MB) - PCIe	32-Bit, 64-Bit	WS3, WS4	EA762AA
	NVIDIA Quadro G-Sync	32-Bit, 64-Bit	WS3, WS4	ED087AA

Hard Drives		Windows XP	Red Hat Linux	Part Number
	SATA Hard Drives			
	HP 74 GB SATA 1.5-Gb/s 10K rpm HDD	32-Bit, 64-Bit	WS3, WS4	DX760A
	HP 80 GB SATA 3Gb/s 7200 rpm HDD	32-Bit, 64-Bit	WS3, WS4	PY276AA
	HP 160 GB SATA 3Gb/s NCQ 7200 rpm HDD	32-Bit, 64-Bit	WS3, WS4	PV944A
	HP 250 GB SATA NCQ 7200 rpm HDD	32-Bit, 64-Bit	WS3, WS4	EA788AA
	HP 500 GB SATA 3Gb/s NCQ 7200 rpm HDD	32-Bit, 64-Bit	WS3, WS4	PV943A
	SCSI Hard Drives	**Windows XP**	**Red Hat Linux**	**Part Number**
	HP 36 GB U320 SCSI 15K rpm HDD	32-Bit, 64-Bit	WS3, WS4	AA616A
	HP 73 GB U320 SCSI 10K rpm	32-Bit, 64-Bit	WS3, WS4	AA613A
	HP 73 GB U320 SCSI 15K rpm	32-Bit, 64-Bit	WS3, WS4	AA617A
	HP 146 GB U320 SCSI 10K rpm	32-Bit, 64-Bit	WS3, WS4	AA614A
	HP 300 GB U320 SCSI 10K rpm	32-Bit, 64-Bit	WS3, WS4	DY672A
	Hard Drive Accessories			
	Bracket HDD 3.5" to 5.25"	32-Bit, 64-Bit	WS3, WS4	DY659A
	Cable, 3 port SCSI xw4200/6200	32-Bit, 64-Bit	WS3, WS4	DY661A
	Removable Drive Enclosures			
	StorCase DX115 SATA Removable Enclosure			EA332AA
	StorCase DX115 SATA/SAS Carrier Tray			RA697AA

After-Market Options

Controllers		Windows XP	Red Hat Linux	Part Number
	SCSI Controllers			
	U320 SCSI Controller - LSI 20320AR RAID 0,1	32-Bit		DZ554A

Removable storage devices		Windows XP	Red Hat Linux	Part Number
	512 MB USB 2.0 Drive Key II	32-Bit, 64-Bit	WS3, WS4	ED516AA
	1 GB USB 2.0 Drive Key II	32-Bit, 64-Bit	WS3, WS4	AG382AA
	1.44 MB Internal Floppy Drive	32-Bit, 64-Bit	WS3, WS4	DY670A
	HP StorageWorks DAT 24 USB external tape drive	32-Bit, 64-Bit	WS3, WS4	DW070A
	HP StorageWorks DAT 24 USB internal tape drive	32-Bit, 64-Bit	WS3, WS4	DW069A
	HP StorageWorks DAT 40 USB external tape drive	32-Bit, 64-Bit	WS3, WS4	DW023A
	HP StorageWorks DAT 40 USB internal tape drive	32-Bit, 64-Bit	WS3, WS4	DW022A
	HP StorageWorks DAT 72 USB external tape drive	32-Bit, 64-Bit	WS3, WS4	DW027A
	HP StorageWorks DAT 72 USB internal tape drive	32-Bit, 64-Bit	WS3, WS4	DW026A
	HP StorageWorks DAT 72 SCSI external tape drive	32-Bit, 64-Bit	WS3, WS4, 7.2, 7.3	Q1523B
	HP StorageWorks DAT 72 SCSI internal tape drive	32-Bit, 64-Bit	WS3, WS4, 7.2, 7.3	Q1522B

Input/Output Devices		Windows XP	Red Hat Linux	Part Number
	Keyboards			
	HP PS/2 Standard Keyboard	32-Bit, 64-Bit	WS3, WS4	DT527A
	HP USB Standard Keyboard	32-Bit, 64-Bit	WS3, WS4	DT528A
	HP USB Smart Card Keyboard (Carbonite/Silver)	32-Bit, 64-Bit	WS3, WS4	ED707AA
	Pointing Devices			
	HP PS/2 2-Button Scroll Mouse	32-Bit, 64-Bit	WS3, WS4	DD440B
	HP USB 2-Button Optical Scroll Mouse	32-Bit, 64-Bit	WS3, WS4	DC172B
	HP USB Optical 3-button mouse	32-Bit, 64-Bit	WS3, WS4	DY651A
	HP USB Optical 3-button 2.9M OEM Mouse	32-Bit, 64-Bit	WS3, WS4	ET424AA
	HP USB Spaceball 5000	32-Bit, 64-Bit	Not Supported	DV675A
	HP USB SpaceMouse	32-Bit, 64-Bit	Not Supported	DZ203A
	HP SpacePilot 3D USB Intelligent Controller	32-Bit, 64-Bit	Not Supported	EF390AA

After-Market Options

Networking		Windows XP	Red Hat Linux	Part Number
	NICs			
	Intel Pro/1000 GT Gigabit PCI NIC	32-Bit	WS3, WS4	AG393AA
	Broadcom 5751 Netxtreme Gigabit PCIe NIC	32-Bit, 64-Bit	WS3, WS4	EA833AA

Memory (DIMMs)		Windows XP	Red Hat Linux	Part Number
	DDR2-533 Memory DIMMs(ECC Unbuffered)			
	HP 256-MB (1x256 MB) PC2-4200 DDR2-553 non-ECC RAM	32-Bit, 64-Bit	WS3, WS4	PV558AA
	HP 256-MB (1x25 6MB) PC2-4300 DDR2-553 ECC Unbuffered RAM	32-Bit, 64-Bit	WS3, WS4	PY575AA
	HP 512-MB (1x512MB) PC2-4200 DDR2-533 non-ECC	32-Bit, 64-Bit	WS3, WS4	PV560AA
	HP 512-MB (1x51 2MB) PC2-4300 DDR2-553 ECC Unbuffered RAM	32-Bit, 64-Bit	WS3, WS4	PY576AA
	HP 2GB (1x2GB) PC2-4200 DDR2-553 ECC RAM	32-Bit, 64-Bit	WS3, WS4	EE599AA
	PC2-5300 (DDR2-667) Memory DIMMs (ECC Unbuffered)			
	HP 256-MB (1x256 MB) DDR2-667 ECC RAM	32-Bit, 64-Bit	WS3, WS4	PV939A
	HP 512-MB (1x512 MB) DDR2-667 ECC RAM	32-Bit, 64-Bit	WS3, WS4	PV940A
	HP 1-GB (1x1 GB) DDR2-667 ECC RAM	32-Bit, 64-Bit	WS3, WS4	PV941A

Monitors	**TFTs**	**Part Number**
	HP TFT LP2465 (24-inch)	EF224A5#
	HP TFT L2335 (23-inch)	P9615W#
	HP TFT LP2065 (20.1-inch) TCO03 Two Tone (Carbonate/Silver)	EF227A5#
	HP TFT L2035 (20.1-inch)	P9614W#
	HP TFT L1955 (19.1-inch)	PH466A4#ABA

Multimedia		Windows XP	Red Hat Linux	Part Number
	Adaptec Fireconnect 2100 Firewire (1394a) PCI Card (Windows only)	32-Bit, 64-Bit		PA997A

NOTE: Although HP Personal Workstations can be ordered with the HP Installer Kit for Linux and an IEEE 1394A card, HP cannot provide customer support for this configuration. Please refer to the Linux Hardware Support Matrix (http://www.hp.com/support/linux_hardware_matrix) for details, and to the Linux User Manual (http://www.hp.com/support/linux_user_manual) for tips on user-enablement of the IEEE 1394A Card.

Audio		**Part Number**
	SoundBlaster X-Fi XtremeMusic Audio Card (Windows only)	EA326AA
	HP Satellite Speakers	ZD929AA

After-Market Options

Optical Drives	Windows XP	Red Hat Linux	Part Number
DVD-ROM Drive			
16X DVD-ROM w/ +R read	32-Bit, 64-Bit	WS4	AA620B
CD-ROM Drive			
48X Max CD-ROM Drive	32-Bit, 64-Bit	WS3, WS4	DC143B
CD-RW Drive			
48X CD-RW Drive (Roxio software)	32-Bit, 64-Bit	WS3, WS4	DE205B
Combo Drive			
48X Combo DVD-ROM/CD-RW Drive (Roxio & WinDVD on Microsoft Windows)	32-Bit, 64-Bit	WS3, WS4	DE206B
DVD+/-RW Drive			
HP 16X DVD+/-RW, DL, LightScribe Drive *(LightScribe software works with Windows 32-Bit only.)	32-Bit, 64-Bit*	WS3, WS4*	DZ555B

Security	Part Number
Chassis clamp lock, universal, no cable	DE817A
Chassis clamp lock, universal, with cable	DE818A

Brackets/Stands	Part Number
Depth Adjustable Rails (stationary)	332558-B21
Sliding Shelf kit	234672-B21
Fixed shelf kit	253449-B21

Other Devices	Part Number
Agere 2006 PCI High-Speed International SoftModem (32-Bit, 64-Bit)	EK694AA
Agere Systems PCI International Softmodem (32-Bit)	DC132D
Modem RJ11 Adapter Kit	DC131C
2nd serial port adapter	PA716A
Front Card Guide and Fan Kit	DY648A
HP xw4 Depth Adjustable Fixed Rail Rack Kit	EK729AA

Operating Systems	Part Number
Red Hat Linux WS 3, Update 7, 32-bit OS	RA354AA
Red Hat Linux WS 3, Update 7, 64-bit OS	RA355AA
Red Hat Linux WS 4, Update 3, 32/64-bit OS	RA356AA

After-Market Options

Software		Windows XP	Red Hat Linux	Part Number
	HP Remote Graphics SW V3 for HP Systems LTU	32-Bit	WS3, WS4	PY682AA
	HP Remote Graphics SW V3 Receiver LTU	32-Bit	WS3, WS4	PY684AA
	HP Remote Graphics SW V3 CD-ROM Media	32-Bit	WS3, WS4	PY685AA
	HP Remote SW for HP 1yr Update Subscription	32-Bit	WS3, WS4	PN680A
	HP Remote SW Receiver 1yr Update Subscription	32-Bit	WS3, WS4	PN682A
HP Care Pack Services	Next Business Day Onsite, HW Support, CPU Only- 4 yrs			U7942E
	Next Business Day Onsite, HW Support, CPU Only - 5 yrs			U7944E
	Next Day Onsite Response- 4 yrs			U7941E
	Next Day Onsite Response - 5 yrs			U7943E
	4-Hour, 9x5 Onsite, HW Support, CPU only - 3 yrs			U4873E
	4-Hour, 9x5 Onsite, HW Support, CPU only, 4 yrs			U7946E
	4-Hour, 9x5 Onsite, HW Support, CPU only, 5 yrs			U7948E
	Basic 8-5, 4-Hour Onsite Response - 3 yrs			U4874E
	Basic 8-5, 4-Hour Onsite Response - 4 yrs			U7945E
	Basic 8-5, 4-Hour Onsite Response - 5 yrs			U7947E
	4-Hour Onsite Response, 24x7, CPU Only - 4 yrs			U7950E
	4-Hour Onsite Response, 24x7, CPU Only - 5 yrs			U7952E
	4-Hour Onsite Response, 24x7 - 4 yrs			U7949E
	4-Hour Onsite Response, 24x7 - 5 yrs			U7951E
	Software Technical Support, Unlimited, 9x5 - 1 yr			U4381E
	4-Hour Onsite, Extended Hours Response, CPU Only - 5 yrs			U7940E
	Software Technical Support, Unlimited, 24x7 - 1 yr			U4382E
	4-Hour Onsite, Extended Hours Response - 5 yrs			U7939E
	Software Technical Support, 10 incidents, 9x5 - 1yr			UA382E
	Software Technical Support, 10 incidents, 24x7- 1yr			UA383E
	Software Technical Support, 25 incidents, 9x5- 1yr			UA396E
	Software Technical Support, 25 incidents, 24x7			UA385E
	Software Technical Support, 50 incidents, 9x5- 1yr			UA398E
	Software Technical Support, 50 incidents, 24x7- 1yr			UA387E
	Post Warranty Service, Next Day Onsite, CPU Only			U4867PE
	Post Warranty Service, 4-Hour, 9x5 Onsite, HW Support, CPU only			U4877PE
	Post Warranty Service, Next Day Onsite			U4868PE
	Post Warranty Service, 4-Hour, 9x5 Onsite, HW Support			U4878PE
	Installation for 2+ IA 32 Workstation; Basic - 1yr			U4879E
	Installation for 1 IA 32 Workstation; Basic - 1yr			U4876E

Memory

Intel 955X Express chipset

DDR2 SDRAM ECC MEMORY

Only unbuffered DDR2 DIMMs are supported and must be either x8 or x16 width. Memory upgrades are accomplished by adding DIMMs of the same or varied sizes. This chart does not represent all possible memory configurations. The Intel 955X chipset supports ECC 667 MHz (PC2-5300) DDR2 memory or non-ECC and ECC 533 MHz (PC2-4300) DDR2 memory.

For best performance the total amount and type of memory loaded into Channel A and Channel B should be the same. If it is not, your computer will see all the RAM installed but will run the memory controller at a lower performance mode. Although not required, for best performance add the memory in pairs rather than as a single DIMM (two 512 MB DIMMs will have better performance than a single 1 GB DIMM). Also, add the memory into both channels (e.g. one in socket 1 and one in socket 3) to take advantage of dual channel performance. If you have unused slots within a channel, make them socket 2 and socket 4. This provides the best margin for the memory bus.

CAUTION:
Mixing speeds will mean that the memory runs at the speed of the slowest DIMM.

Do not mix ECC and non-ECC memory. The system will not boot if ECC and non-ECC DIMMs are mixed.

Do not mix single-sided and double-sided DIMMs. Both sides of a double-sided DIMM must have the same memory size. Each rank (side) of the DIMM must be the same size.

MAXIMUM MEMORY

Supports up to 8 GB of ECC DDR2 533 MHz or 4 GB of DDR2 667 MHz SDRAM

POSSIBLE MEMORY CONFIGURATIONS

Not all memory configurations possible are represented below.

DIMM Size	Slot			
	1	2	3	4
256 MB (single channel performance configuration)	256 MB			
512 MB	256 MB		256 MB	
1 GB	512 MB		512 MB	
1.5 GB	256 MB	512 MB	256 MB	512 MB
2 GB	1 GB		1 GB	
2 GB	512 MB	512 MB	512 MB	512 MB
4 GB	1 GB	1GB	1 GB	1GB
4 GB	2 GB		2 GB	
6 GB	1 GB	2 GB	1 GB	2 GB
8 GB	2 GB	2 GB	2 GB	2 GB

Tower configuration

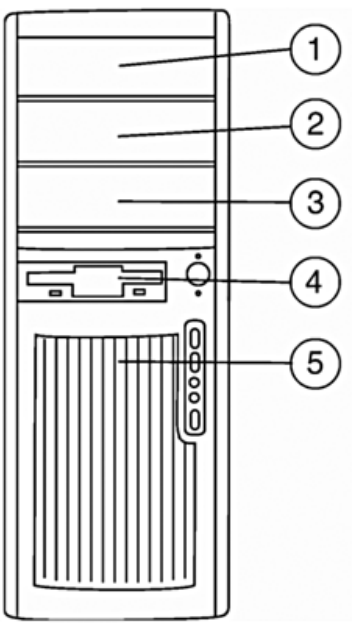

	Quantity Supported	Position Supported	Controller
Convertible Minitower			
Optional Diskette Drive	1	4	Diskette
Optical Disk Drives	2	1, 2	IDE
Hard Disk Drives	2 standard (4 SATA w/AMO) (3 SCSI w/AMO)	5, 6 (and 2 or 3, for 3rd or 4th drives using optical bays, adapter kit(s) required)	SATA (and/or optional SCSI) Factory Integrated RAID* 0, 1 User configurable SATA RAID 0, 1 5, 10 standard

*** NOTE**: Hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent, functionality and performance. It is a good alternative to hardware-based RAID. Please visit http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf for RAID capabilities with Linux.

Additional Technical Specifications

System Board	
Architecture	Intel Pentium 4 EM64T/PCI-E
Chipset	Intel 955X Express North Bridge/ICH7R South Bridge
Super I/O Controller	SMSC SCH5307
System Board Form Factor	ATX
Processor Socket	LGA775
DIMM Connectors (DDR2, 1.8V)	4 ECC support
AGP Connector (1.5V)	None
Integrated Graphics	None
PCI Connectors (5.0V)	3 full length 33 MHz 32-bit
PCI Express Connectors (v1.0a)	1 x16 1 x8' (x4 bandwidth) 1 x1
Flash ROM	Yes
AC97 integrated audio	Yes
CD ROM IN (Audio)	No
AUX IN (Audio)	Yes
Internal speaker	Yes
Clear CMOS Button	Yes
CPU Fan Header	Yes
Chassis Fan Header	Yes
Chassis Speaker Header	Yes
CMOS Battery Holder – Lithium	Yes
Hood Lock Header	Yes
Hood Sensor Header	Yes
Multibay Header	No
Integrated SATA RAID	• Multiple Volume support to enable RAID 0, RAID 1, RAID 5, or RAID 10 on a single array • Support for 1 or 2 RAID arrays on 4 ports for RAID 0 or RAID 1 • RAID 1 spare and auto-rebuild • Matrix RAID* support • AHCI support for NCQ drives • 3 Gb/s drive support *** NOTE**: Hardware RAID is not supported on Linux systems. The Linux kernel, with built-in software RAID, provides excellent, functionality and performance. It is a good alternative to hardware-based RAID. Please visit http://h20000.www2.hp.com/bc/docs/support/SupportManual/c00060684/c00060684.pdf for RAID capabilities with Linux.
Integrated Broadcom NetXtreme Gigabit ethernet for HP	Yes
Wake-On-Lan®	Yes

Additional Technical Specifications

ASF 1.0 and 2.0 (Alert Standard Format)	Yes
Power Supply Header	Yes
Power Switch, Power LED & Hard Drive LED Header	Yes
Password Clear Header	Yes
Riser Connector	None
HDD activity LED Header	Yes
PCI extender that connects to System Board	None

Cooling	
Chassis Fan	92 mm
Processor Heatsink Fan	70 or 80 mm
Power Supply Fan	92 mm

Power Supply	
Full Ranging Input (Line Select Switch)	Yes
Active Power Factor Correction (APFC) (Input Current is nearly 1/2 a non-APFC PS)	Yes
Passive Power Factor Correction (PFC)	No
Operating Voltage Range	90 – 264 VAC/118 VAC
Rated Voltage Range	100 – 240 VAC
Rated Line Frequency	50-60 Hz/400Hz
Operating Line Frequency Range	47 – 66 Hz/393 – 407Hz
Rated Input Current	7.4A/7.4A
Maximum Rated Power	460 Watt Continuous
Heat Dissipation	Typical 733.8 btu/hr Maximum 2415.4 btu/hr
Power Supply Fan	92mm variable speed
PS Size	3.84 x 5.91 x 6.05 in (97.6 x 150 x 153.71 mm)
Energy Star Compliant	Yes
FEMP Standby Power Compliant (<2W in S5 - Power Off)	Yes if Wake-on-LAN disabled. System board may draw more power if Wake-on-LAN enabled.
Power Consumption in ES Mode - Suspend to RAM (S3) (Instantly Available PC)	~2W (will depend on configuration)
Surge Tolerant Full Ranging Power Supply	Withstands power surges up to 2000V

Typical configuration power consumption	One processor (1 x 3.60 GHz 2 MB L2 Cache, Pentium 4 Processor with HT Technology) One GB memory (2 x 512 MB) Two hard drives (2 x SATA 40 GB) CD-ROM drive PCI Express Graphics Card (NVIDIA FX 1400) One diskette Monitor		
	Input Power consumption	**@ 120Vac/60Hz**	
	Typical operating mode (system busy)	215 W	= 733.8 btu/hr
	Windows XP Idle	107 W	= 365.2 btu/hr
	Standby mode (S3)	2 W	= 6.83 btu/hr
	Hibernate mode (S4)	~1 W	= 3.41 btu/hr *
	Power Off (S5)	~2 W ~1 W	= 6.83 btu/hr * = 3.41 btu/hr *
		* when Wake-on-LAN disabled	

ROM Features	**Description**
PCI 3.0 Support	Full BIOS support for PCI Express through industry standard interfaces.
ASF 2.0 Compliant	Allows workstation status to be monitored on a remote console.
BIOS Boot Spec 1.01+	Provides more control over how and from what devices the workstation will boot.
BIOS Power on	Users can define a specific date and time for the system to power on.
Instantly Available PC (Suspend to RAM - ACPI sleep state S3)	Allows for very low power consumption with quick resume time
ROM Based Computer Setup Utility (F10)	Review and customize system configuration settings controlled by the BIOS.
Remote System Installation via F12 (PXE) (Remote Boot from Server)	Allows a new or existing system to boot over the network and download software, including the operating system
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS
CMOS Archive and CMOS Restore	Holding down the power button restores the last known good BIOS settings.
Serial, Parallel, USB, Audio, Network, Enable/Disable Port Control	Enable or disables serial, parallel, USB, audio, and network ports
Removable Media Write Control/ Boot Control	User can prevent the workstation from writing to or booting from removable media
Power-On Password	Prevents an unauthorized person from booting up the computer
Setup Password	Prevents an unauthorized person from changing the system configuration
Replicated Setup	Saves BIOS settings to diskette or USB flash device in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering Computer Setup Utility (F10)
Memory Change Alert (Requires HP Client Manager Software)	Alerts management console if memory is removed or changed

Technical Specifications

Thermal Alert (Requires HP Client Manager Software)	Monitors the temperature state within the chassis. Three modes: • NORMAL - normal temperature ranges • ALERTED - excessive temperatures are detected. Raises a flag so action can be taken to avoid shutdown or provide for a smoother system shutdown • SHUTDOWN - excessive temperatures are encountered. Automatically shuts down the computer without warning before hardware component damage occurs
Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console
Remote Wakeup	• System administrators can power on, restart, and power off a client computer from a remote location.
ACPI (Advanced Configuration and Power Management Interface)	• Allows the system to enter and resume from low power modes (sleep states) • Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system • Supports ACPI 2.0 for full compatibility with 64-bit operating systems
SMBIOS	System Management BIOS 2.3.5, previously known as DMI BIOS, for system management information
ROM revision levels	Identifies system ROM revision levels and reports in Computer Setup Utility (F10). Version is stored in an industry standard memory location (SMBIOS) so that management SW applications can use and report this information
System board revision level	• Allows management SW to read revision level of the system board • Revision level is digitally encoded into the HW and cannot be modified
Ownership Tag	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen

Industry Standard	**Revision Supported by the BIOS**
ACPI	Advanced Configuration and Power Management Interface, Version 2.0
ASF	Alert Standard Format Specification, Version 2.0
ATA (IDE)	AT Attachment 6 with Packet Interface (ATA/ATAPI-6), Revision 3b
ATAPI	ATAPI Removable Media Device BIOS Specification Version 1.0
BBS	BIOS Boot Specification v1.01
BIOS 32-bit Services	Standard BIOS 32-bit Service Directory Proposal
CD Boot	"El Torrito" Bootable CD-ROM Format Specification Version 1.0
EDD	• Enhanced Disk Drive Specification Version 1.1 • BIOS Enhanced Disk Drive Specification Version 3.0
EHCI	Enhanced Host Controller Interface for Universal Serial Bus, Revision 1.0
PCI	• PCI Local Bus Specification, Revision 2.3 • PCI Power Management Specification, Revision 1.1 • PCI Firmware Specification, Revision 3.0, Draft .7
PCI Express	PCI Express Base Specification, Revision 1.0a
PMM	POST Memory Manager Specification, Version 1.01
SATA	• Serial ATA Specification, Revision 1.0a • Serial ATA 3 Gb/s: Extensions to Serial ATA 1.5 Gb/s, Revision 1.0
SMBIOS	System Management BIOS Reference Specification, Version 2.4
SPD	PC SDRAM Serial Presence Detect (SPD) Specification, Revision 1.2B
TPM	Trusted Computing Group TPM Specification Version 1.2
UHCI	Universal Host Controller Interface Design Guide, Revision 1.1
USB 1.1	Universal Serial Bus Revision 1.1 Specification
USB 2.0	Universal Serial Bus Revision 2.0 Specification

Other deployment & management features	
HP Client Management Solutions	HP Client Management Solutions help simplify management of Workstations and significantly reduce total ownership costs. These solutions share a common design and are highly integrated due to the extensive work between HP and its partner Altiris. HP Client Manager Software is included free with all HP business PCs and Workstations. It enables central tracking, monitoring, and management of the hardware aspects of HP client systems: • Get valuable hardware information such as CPU, memory, video, and security settings • Monitor system health to fix problems before they occur • Install drivers and BIOS updates without visiting each PC • Remotely configure BIOS and security settings • Automate processes to quickly resolve hardware problems Additional Altiris solutions (fee-based) are available to address Workstation management challenges through the entire IT lifecycle including: • Inventory assessment • Software license compliance • Personality migration • Software image deployment • Software distribution • Asset management • Client backup and recovery • Problem resolution Visit http://www.hp.com/go/easydeploy for more information, to download HP Client Manager Software, and to evaluate the Altiris solutions.
System Software Manager (free)	A free utility that detects and updates BIOS, device drivers, and management agent versions on your networked PCs and workstations
Replicated Setup	Saves BIOS settings to diskette or USB disk-on-key in human readable file. Repset.exe utility can then replicate these settings on machines being deployed without entering ROM-based F10 setup
Software Restore CD	Restores computer to its original factory shipping image
Asset Tag	• Repository for storing company-specific property asset numbers for easy tracking • Initially set equal to the system serial number • Stored in a protected section of non-volatile memory that can be accessed and modified with the F10 Setup program
DIMM Serial Presence Detect	Detects whether or not memory DIMMs are present and their type
Hard drive serial number, model, and manufacturer	Hard drive manufacturer, model, and serial number is stored in the hard drive firmware and reported in ROM-based F10 setup
System serial number, model, & manufacturer	System serial number, model, & manufacturer stored in a non-volatile memory and can be retrieved with management SW or viewed in ROM-based F10 setup
ROM revision levels	Identifies system ROM revision levels and reports in ROM-based F10 setup Version is stored in an industry standard memory location (SMBIOS) so that management SW applications can use and report this information
System board revision level	• Allows management SW to read revision level of the system board • Revision level is digitally encoded into the HW and cannot be modified
Memory Change Alert (Requires HP Client Manager Software)	Alerts management console if memory is removed or changed
Ownership Tag	A user-defined string stored in non-volatile memory that is displayed in the BIOS splash screen

Ultra ATA Integrity Monitoring (CRC Checking)	A feature of SATA and SCSI, Cyclic Redundancy Checking provides data transfer verification and proactive notification of hard drive data transmission problems with recommendations for enhancing system performance. It detects all the following errors' types: • single-bit errors • double-bit errors • an odd number of errors • error bursts up to 32-bits long
Drive Self Tests (DPS)	• Drive Protection System (Adaptec and LSI SCSI controllers do not offer DPS) • A diagnostic hard drive self test. It scans critical physical components and every sector of the hard drive for physical faults and then reports any faults to the user. • Running independently of the operating system, it can be accessed through the computer's setup procedure. It produces an evaluation on whether the hard drive is the source of the problem and needs to be replaced. The system expands on the Self-Monitoring, Analysis, and Reporting Technology (SMART), a continuously running systems diagnostic that alerts the user to certain types of failures DPS Access through F10 Setup during Boot (F10 diagnostic access not available with SCSI drives)
SMART Technology (Self-Monitoring, Analysis and Reporting Technology)	Allows hard drives to monitor their own health and to raise flags if imminent failures were predicted Predicts failures before they occur. Tracks fault prediction and failure indication parameters such as re-allocated sector count, spin retry count, calibration retry count. By avoiding actual hard drive failures, SMART hard drives act as "insurance" against unplanned user downtime and potential data loss from hard drive failure. SMART I – Drive Failure Prediction SMART II – Off-Line Data Collection SMART III – Off-Line Read Scanning with Defect Reallocation

Security Features	
Padlock support	Padlock loop in rear of chassis. Locks side cover and secures chassis from theft. (0.22" diameter)
Cable Lock Support	Kensington lock slot in rear of chassis. Locks side cover and secures chassis from theft. (3mm x 7mm opening)
Universal chassis clamp lock support	Threaded feature in rear of chassis. Locks side cover and locks cables to chassis. Secures chassis from theft and allows multiple units to be chained together when used with optional cable.
Solenoid lock and hood sensor	Yes
Serial, Parallel, USB Enable/Disable	Enable or disable serial, parallel or USB ports and hide them form the operating system
Removable Media Write/ Boot Control	Prevents the computer from being booted from removable media on supported devices (and can disable writes to media)
Power-On Password	Prevents an unauthorized person from booting up the computer
Setup Password	Prevents an unauthorized person from changing the system configuration

Technical Specifications

System Software Updating	
Product Change Notification	• Program to proactively communicate Product Change Notifications (PCNs) and Customer Advisories by email to customers, based on a user-defined profile. • PCNs provide advance notification of hardware and software changes to be implemented in the factory providing time to plan for transition. • Customer Advisories provide concise, effective problem resolution, greatly reducing the need to call technical support.
Remote ROM Flash	Provides secure, fail-safe ROM image management from a central network console
Remote Wakeup/ Remote Shutdown	• System administrators can power on, restart, and power off a client computer from a remote location. • Enables cost-effective power consumption when the administrator needs to distribute software, perform security management, or update the ROM.
ROM Based Setup (F10) and Start-up Diagnostics	Yes
Support Software CD & WWW	Yes

Other Features	
ACPI-Ready Hardware	Advanced Configuration and Power Management Interface (ACPI). • Allows the system to wake from a low power mode. • Controls system power consumption, making it possible to place individual cards and peripherals in a low-power or powered-off state without affecting other elements of the system

Serviceability Features of System	
Access panel	Tool-less
Optical drives	Tool-less
Floppy drive	Tool-less
Hard drives	Tool-less
Expansion cards	Tool-less
Green user touch points	Yes, on tool-free internal chassis mechanisms
Color-coordinated cables and connectors	Yes
Memory	Tool-less, can be upgraded without removing any internal components
System board	Tool-less removal
Dual Color Power and HD LED on Front of Computer (Indicates Normal Operations and Fault Conditions)	green – normal red – fault
System/Emergency ROM Flash Recovery with Video	Recovers corrupted system BIOS.
Configuration Record SW	Yes
Over-Temp Warning on Screen (Requires IM Agents)	Yes

Restore CD set	Restores the computer to its original factory shipping image
Flash ROM	Yes
3.3V Aux Power LED on System PCA	Yes
Dual Function 5V Aux Power LED (ON)/PS_ON LED (OFF) on System PCA	Yes
Diagnostic Power Switch LED on board	Yes
Clear Password Jumper	Yes
Clear CMOS Button	Yes
CMOS Battery Holder for easy Replacement	Yes
Processor ZIF Socket for easy Upgrade	Yes
DIMM Connectors for easy Upgrade	Yes
NIC LEDs (integrated) (Green & Amber)	Used to determine NIC status
ASF 1.0 support (Alert Standard Format)	Industry-standard specification for network alerting in operating system-absent environments
Dual function front power switch	Also acts as a reset switch when held for 4 seconds

Service and Support	On-site Warranty and Service (Note 1): This three-year, limited warranty and service offering delivers three years of on-site, next business-day (Note 2) service for parts and labor and includes free telephone support (Note 3) 24 x 7. Global coverage (Note 2) ensures that any product purchased in one country and transferred to another, non-restricted country will remain fully covered under the original warranty and service offering.
	NOTE 1: Terms and conditions may vary by country. Certain restrictions and exclusions apply.
	NOTE 2: On-site service may be provided pursuant to a service contract between HP and an authorized HP third-party provider, and is not available in certain countries. Global service response times are based on commercially reasonable best effort and may vary by country.
	NOTE 3: Technical telephone support applies only to HP-configured, HP and HP-qualified, third-party hardware and software. Toll-free calling and 24 x 7 support may not be available in some countries.

Technical Specifications - Audio

High Definition Integrated Realtek ALC260 Audio	**Type**	Integrated
	High Definition Codec	Yes
	FM Synthesis Support	Yes
	OPL3 FM Synthesis Support	Yes
	Sound Blaster Compatibility	Yes
	SPDIF 6-channel pass-through	No
	Audio Jacks	One Front fixed stereo analog Microphone-In (20-K ohm Input Impedance); One Front fixed stereo Headphone-Out (expects at least a 32ohm load) One Line-In* (12-K ohm Input Impedance)* One Line-Out * (less than 800 ohms Output Impedance, expects at least a 10-K ohm load) One Stereo analog Microphone-In* (20-K ohm Input Impedance) **NOTE:** *Rear audio port are re-taskable as Line-In, Line-Out, Microphone-In, or Headphone-Out with Optional driver, available only through download from HP support website and not supported by default. External Speakers need to be powered externally.
	Sampling	44.1 kHz/48 kHz/96 kHz/192 kHz (output only)
	Wavetable Syntheses (software)	Yes – GM and FM Midi Support, Direct Music and Down Loadable Soundset (4 Meg DLS Level 1 and 2 Support)
	3D Positional Sound	No
	Digital Audio	Yes
	Analog Audio	Yes
	DVD Audio	Yes
	Number of Channels on Line-Out (mono/stereo)	Stereo (Left & Right channels)
	Internal Audio Speaker Power Rating	1.5 W
	Internal Speaker	Yes
	Hardware Equalizer for Internal Speaker	No
	External Speaker Jack (Line-Out)	Yes
Sound Blaster X-Fi XtremeMusic Audio Card	**Audio Quality**	Total Harmonic Distortion + Noise at 1kHz (20kHz Low-pass filter) = 0.004%
	Signal to Noise Ratio (SNR)	Signal-to-Noise Ratio (20kHz Low-pass filter, A-Weighted) • Stereo Output: 109dB • Front and Rear Channels: 109dB • Center, Subwoofer and Side Channels: 109dB

Technical Specifications - Audio

Sound Conversion	24-bit Analog-to-Digital conversion of analog inputs at 96kHz sample rate	
	24-bit Digital-to-Analog conversion of digital sources at 96kHz to analog 7.1 speaker output	
	24-bit Digital-to-Analog conversion of stereo digital sources at 192kHz to stereo output	
Recording/Sampling Rate	44.1, 48 and 96kHz	
ASIO 2.0 support	16-bit/44.1kHz, 16-bit/48kHz, 24-bit/44.1kHz 24-bit/48kHz and 24-bit/96kHz with direct monitoring	
Enhanced SoundFont support	up to 24-bit resolution	
	24-bit/96kHz	
DACs	24-bit/192kHz	
Voice Support	128 voices	
Max. Channels in 3D Positional Audio	7.1	
EAX® ADVANCED HD™ 5.0 support	Yes including EAX® MacroFX™, EAX® PurePath™ and Environment FlexiFX™	
Connectors	FlexiJack (Performing a 3-in-1 function, Digital In / Line In / Microphone) via 3.50 mm minijack	
	Line level out (Front / Rear / Center / Subwoofer / Rear Center) via 3.50 mm minijacks	
	AUX_IN line-level analog input via 4-pin Molex connector on card	
	One AD_Link (26 pin) connector for linking to the X-Fi I/O Console (upgrade option)	
Dimensions	7.25" x5" x .9" (x x)	
Additional product features	**Movies**	THX Certification Dolby Digital EX 6.1 Playback DTS-ES 6.1 Playback
	Music	X-Fi 24-bit Crystalizer CMSS-3D SuperRip
	Audio Creation	Pristine audio playback quality with a near transparent SRC engine Up to eight 24 bit hardware effects ASIO recording with latency as low as one millisecond 24-bit SoundFont® sampling 3D MIDI
	Gaming	EAX ADVANCED HD 5.0

	Software Bundle	Doom 3 Sound Blaster EAX patch Entertainment Mode Audio Creation Mode Game Mode Mode Switcher Audio Console Creative MediaSource Creative MediaSource DVD-Audio Player DTS Neo:6 Settings Karaoke Player Entertainment Center Smart Recorder SoundFont Bank Manager Speaker Connection Wizard THX Setup Console Vienna SoundFont Studio Volume Panel WaveStudio Console Launcher Creative Media Toolbox Creative Diagnostics
Minimum system requirements	**System RAM**	256MB
	Hard disk	600MB free space Available PCI 2.1 slot for the audio card CD-ROM/CD-RW or CD/DVD-ROM required for software installation
	Operating System	Microsoft® Windows® XP Service Pack 2 (SP2)

Technical Specifications - Communications

Broadcom BCM5752 NetXtreme Gigabit Ethernet LOM (PCIe)	**Connector**	RJ-45
	Controller	Broadcom 5752 PCI-E LAN Controller
	Memory	Integrated 64KB receive buffer and 8KB transmit buffer
	Data rates supported	10/100/1000 Mbps
	Compliance	IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	Bus architecture	PCIe 1.0a
	Data path width	X1
	Data path speed	2.5Gbit per sec per direction transfer rate
	Data transfer mode	Bus-master DMA
	Hardware certifications	
	Power requirement	1.5 watts @ +3.3V AUX supply
	Boot ROM support	Yes
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps
		10BASE-T (full-duplex) 20 Mbps
		100BASE-TX (half-duplex) 100 Mbps
		100BASE-TX (full-duplex) 200 Mbps
		1000BASE-T, 1000 Mbps
	Operating system driver support	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux 3
	Management capabilities	WOL, PXE
	Alerting	ASF 2.0

Broadcom BCM5751 NetXtreme Gigabit Ethernet Controller (PCIe)	**Connector**	RJ-45
	Controller	Broadcom 5751 PCI-E 1.0a LAN Controller
	Memory	Integrated 96Kb frame buffer memory
	Data rates supported	10/100/1000 Mbps
	Compliance	IEEE 802.3, 802.3AB and 802.3u compliant, 802.3x flow control
	Bus architecture	PCI-E 1.0a
	Data path width	X1
	Data path speed	2.5Gbit per sec per direction transfer rate
	Data transfer mode	Bus-master DMA
	Hardware certifications	FCC class B, NRTL Mark Canada and United States, C-Tick for Australia, BSMI for Taiwan, VCCI for Japan, MIC for Korea, GOST for Russia
	Power requirement	3.1 watts @ +3.3V AUX supply
	Boot ROM support	Yes
	Network transfer rate	10BASE-T (half-duplex) 10 Mbps
		10BASE-T (full-duplex) 20 Mbps
		100BASE-TX (half-duplex) 100 Mbps
		100BASE-TX (full-duplex) 200 Mbps
		1000BASE-T, 1000 Mbps

	Environmental	**Operating temperature** 32° to 131° F (0° to 55° C) **Operating humidity** 85% at 131° F (55° C)
	Dimensions	4.4 x 2.2 x 0.08 in (11.2 x 5.5 x 0.2 cm)
	Operating system driver support	Microsoft Windows 2000 and XP, Red Hat Linux 7.2, 7.3 and Red Hat Enterprise Linux 3
	Management capabilities	WOL, PXE , Remote cable management
	Alerting	ASF 2.0
	Kit contents	Broadcom 5751, CD, Broadcom 5751 Netxtreme Gigabit PCIe NIC, drivers, quick install guide, product warranty statement
Agere Systems PCI International Softmodem	**Data Transmission**	Technology speeds: 56,000 Kbps maximum downstream data, controllerless **NOTE:** 56 Kbps technology refers to download speeds only and requires compatible modems at server sites. Other conditions may limit modem speed. FCC limitations allow a maximum of 53 Kbps during download transmissions.
	Data Speeds	(Upload only) 33,600/31,200/28,800/26,400/21,600/19,200/16,800/14,400/12,000/9,600/7,200/4,800/2,400/1,200/300
	Data Standards	ITU-T V.90, ITU-T, ITU-T V.34, V.44, V.42, V.42bis21, V.32bis, Bell 212A, and Bell 103
	Fax Speeds	14,400/12,000/9,600/7,200/4,800/2,400/1,200/300 b/s
	Fax Mode Capabilities	ITU-T T.31 class 1 FAX, V. 17, V.29, V.27ter, and V.21 Channel 2
	Error Correction and Data Compression	V.44, 42bis, V.42 and MNP2-5
	Power Management	ACPI; PPMI 1.1 and wake support with PME and Vaux; meets PCI 2.3 requirements and PC 2001 requirements
	Upgradeability	Driver upgradeable for future enhancements
	Video	ITU-T V.80 video ready interface
	Other	TIA/EIA 602 standard AT command set Integrated DTE interface with speeds of up to 115.2 Kbps, parallel 16550a UART-compatible interface Optional ring wakeup signal
	Operating Temperature	32° to 158° F (0° to 70° C)
	Operating Humidity	20% to 90%, non-condensing
	Operating System Support	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition
	OS Driver Support	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition
	Power	Requires a 3.3-V auxiliary power rail on PCI bus Uses only one PCI load (i.e., one grant/request pair), one shared IRQ, one electrical load
	Chipset	Agere Systems SV92PL – Integrated PCI interface with 5-V tolerant buffers and CardBus support

Technical Specifications - Communications

Dimensions (L X H)	Complies with PCI low profile specifications-6.7 x 2.3 in (17.0 x 5.8 cm) and supports high- and low-profile brackets
Connection	Single RJ-11 connector
Other Features	Digital line protection, call progress monitoring via on-board piezo device, support for high profile and low profile brackets, PnP ID support
Safety	UL recognized to UL 1950, 3rd edition (U.S. and Canada); IEC 950 (TUV, NEMKO, DEMKO, SEMKO); CE Mark, EC 950 (TUV, NEMKO, DEMKO, SEMKO, CE mark
EMC	FCC Part 15, IC ES003, EN 55022, 3rd edition, EN 55024, annex A, EN 61000-4-6, EN 61000-4-8
Telecom	FCC Part 68, IC-CS-03 (Canada); Worldwide PTT approvals Not available in Korea or the Republic of South Africa.
Health	Bare PCB material compliant to 94V-0 or better (marked as such)
Other	PC 2001 compliant, PCI version 2.3, WHQL approved; ACPI compliant
Kit Contents	DC132D : Agere Systems PCI International Softmodem with full-height bracket attached, additional low-profile bracket, RJ11 modem cable, driver and documentation CD. **NOTE:** RJ11 modem adapter is not included. DC131C #xxx: RJ11 modem adapter kit for use with DC132D #ACP: Austria, #ABW: Belgium (Dutch/Flemish), #AKN: Bosnia, Herzegovna, Croatia, Slovenia, Yugoslavia (Slovenian), #AKB: Czech Republic (Czech) & Slovakia, #ABF: France, #ABD: Germany, #AB7: Greece, #AKC: Hungary, #ABT: Israel, #ABZ: Italy, #ABH: Netherlands, #UUW: Nordic Region, #ACB: Russia, #ACQ: South Africa, #ACD: Switzerland, #AB8: Turkey, #ABU: UK, #ABG: Australia, New Zealand, #ACJ: India.

Technical Specifications - Controllers

U320 SCSI Controller - LSI 20320AR RAID 0,1 including external connector (required with SCSI HDDs)	**Bus architecture**	PCI-X (backward compatible with PCI)
	Number of supported devices	Up to 15 SCSI devices
	Interface protocol	64 bit, 133MHz PCI-X
	Host bus transfer rate	Up to 1MB/s
	SCSI data transfer rate	Up to 320 MB/s per channel
	SCSI Bus	Wide Ultra320, Low Voltage Differential, and Ultra Wide Single-Ended
	Internal connector	68-pin HD
	External connector	68 pin
	Total connectors	2
	Plug and Play Support	No
	Dimensions (H x L)	6.6 x 2.5 in (16.9 x 6.4 cm)
	Approvals	CE, VCCI, Canada, C-Tick, FCC class B, UL 94VO
	Operating system support	Microsoft Windows XP Professional Windows XP Professional x64 Edition
	Kit contents	Controller card, driver CD, LED cables, user documentation and warranty card.

U320 SCSI Controller - LSI 20320AR RAID 0,1single-channel host adapter	**Bus architecture**	PCI-X (backward compatible with PCI)
	RAID level supported	single RAID volume RAID 0, 1, or 1E
	Number of supported devices	Up to 15 SCSI devices
	Interface protocol	64 bit, 133MHz PCI-X
	Host bus transfer rate	Up to 1 MB/s
	SCSI data transfer rate	Up to 320 MB/s per channel
	SCSI Bus	Wide Ultra320, Low Voltage Differential, and Ultra Wide Single-Ended
	Internal connector	68-pin HD
	External connector	68-pin VHDCI
	Total connectors	2
	Plug and Play Support	No
	Dimensions (H x L)	6.6 x 2.5 in (16.9 x 6.4 cm)
	Approvals	CE, VCCI, Canada, C-Tick, FCC class B, UL 94VO
	Operating system support	Microsoft Windows XP Professional, Red Hat Enterprise Linux Workstation 3
	Kit contents	Controller card, driver CD, LED cables, user documentation and warranty card.

Serial ATA 1.5-Gb/s Hard Drives (7200 rpm)	**250 GB**	**Capacity**	250,059,350,016 bytes	
		Height	1 in (2.6 cm)	
		Width	Media diameter: 3.5 in (8.9 cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA	
		Synchronous Transfer Rate (Maximum)	150 MB/s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	**Single Track**	0.8 ms
			Average	<9.0 ms
			Full-Stroke	≤17 ms
		Rotational Speed	7,200 rpm	
		Logical Blocks	488,397,168	
		Operating Temperature	41° to 131°F (5° to 55°C)	
	400 GB	**Capacity**	400,088,457,216 bytes	
		Height	1 in (2.6 cm)	
		Width	Media diameter: 3.5 in (8.9.x cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA	
		Synchronous Transfer Rate (Maximum)	150 MB/s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	**Single Track**	0.8 ms
			Average	<11.0 ms
			Full-Stroke	≤15 ms
		Rotational Speed	7,200 rpm	
		Logical Blocks	781,422,768	
		Operating Temperature	41° to 131°F (5° to 55°C)	

Technical Specifications - Hard Drives

Serial ATA 1.5-Gb/s Hard Drives (10,000 rpm)	**74 GB**	**Capacity**	74,355,769,344 bytes	
		Height	1.0 in (2.54 mm)	
		Width	Media diameter: 3.3 in (84mm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA	
		Synchronous Transfer Rate (Maximum)	150 MB/s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	**Single Track**	0.3 ms
			Average	4.5 ms
			Full-Stroke	10.2 ms
		Rotational Speed	10,000 rpm	
		Logical Blocks	145,226,112	
		Operating Temperature	41° to 140° F (5 to 60° C)	
Serial ATA 3.0-Gb/s Hard Drives	**500 GB**	**Capacity**	500,107,862,016 bytes	
		Height	1.0 in (2.54 cm)	
		Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA (3.0 Gb/s), Native Command Queuing enabled	
		Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
		Buffer	16 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	**Single Track**	1.3 ms
			Average	20.0 ms
			Full-Stroke	30 ms
		Rotational Speed	7,200 rpm	
		Logical Blocks	976,773,168	
		Operating Temperature	41° to 131° F (5° to 55° C)	

Technical Specifications - Hard Drives

250 GB	**Capacity**	250,059,350,016 bytes	
	Height	1 in (2.54 cm)	
	Width	Media diameter: 3.5 in (8.89 cm)	
		Physical size: 4 in (10.2 cm)	
	Interface	Serial ATA (3.0 Gb/s)	
	Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
	Buffer	8 Mbytes	
	Seek Time (typical reads, includes controller overhead, including settling)	**Single Track**	1.0 ms
		Average	8.5 ms
		Full-Stroke	18 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	488,397,168	
	Operating Temperature	41° to 131° F (5° to 55° C)	
160 GB	**Capacity**	163,928,604,672 bytes	
	Height	1.0 in (2.54 cm)	
	Width	Media diameter: 3.5 in (8.89 cm)	
		Physical size: 4 in (10.2 cm)	
	Interface	Serial ATA (3.0 Gb/s)	
	Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
	Buffer	8 Mbytes	
	Seek Time (typical reads, includes controller overhead, including settling)	**Single Track**	0.9 ms
		Average	9.3 ms
		Full-Stroke	18 ms
	Rotational Speed	7,200 rpm	
	Logical Blocks	320,173,056	
	Operating Temperature	41° to 131° F (5° to 55° C)	

Technical Specifications - Hard Drives

	80 GB	**Capacity**	80,026,361,856 bytes	
		Height	1.0 in (2.54 cm)	
		Width	Media diameter: 3.5 in (8.89 cm) Physical size: 4 in (10.2 cm)	
		Interface	Serial ATA (3.0 Gb/s)	
		Synchronous Transfer Rate (Maximum)	Up to 3 Gb/s	
		Buffer	8 MB	
		Seek Time (typical reads, includes controller overhead, including settling)	**Single Track**	2 ms
			Average	9.3 ms
			Full-Stroke	21 ms
		Rotational Speed	7,200 rpm	
		Logical Blocks	156,301,488	
		Operating Temperature	41° to 131° F (5° to 55° C)	
Ultra320 SCSI Hard Drives (10,000 rpm)	**73 GB**	**Capacity**	73,407,865,856 bytes	
		Height	1.0 in (2.54 cm)	
		Width	3.5 in (8.9 cm)	
		Interface	68 pin LVD SCSI	
		Synchronous Transfer Rate (Maximum)	320 MB/s	
		Buffer	8 Mbytes	
		Seek Time (typical reads, includes controller overhead, including settling)	**Single Track**	0.3 msec
			Average	<4.5 msec
			Full-Stroke	<11.0 msec
		Rotational Speed	10,000 rpm	
		Logical Blocks	143,374,738	
		Operating Temperature	40° to 130° F (5° to 55° C)	

Technical Specifications - Hard Drives

146 GB	**Capacity**	146,815,737,856 bytes	
	Height	1.0 in (2.54 cm)	
	Width	3.5 in (8.9 cm)	
	Interface	68 pin LVD SCSI	
	Synchronous Transfer Rate (Maximum)	320 MB/s	
	Buffer	8 Mbytes	
	Seek Time (typical reads, includes controller overhead, including settling)	**Single Track**	0.3 msec
		Average	<4.5 msec
		Full-Stroke	<11.0 msec
	Rotational Speed	10,000 rpm	
	Logical Blocks	286,749,488	
	Operating Temperature	40° to 130° F (5° to 55° C)	
300 GB	**Capacity**	300,000,000,000 bytes	
	Height	1.0 in (2.54 cm)	
	Width	3.5 in (8.9 cm)	
	Interface	68 pin LVD SCSI	
	Synchronous Transfer Rate (Maximum)	320 MB/s	
	Buffer	8 Mbytes	
	Seek Time (typical reads, includes controller overhead, including settling)	**Single Track**	0.3 msec
		Average	<4.5 msec
		Full-Stroke	<11.0 msec
	Rotational Speed	10,000 rpm	
	Logical Blocks	585,937,500	
	Operating Temperature	40° to 130° F (5° to 55° C)	

Technical Specifications - Hard Drives

Ultra320 SCSI Hard Drives (15,000 rpm)	**36 GB**	**Capacity**	36,420,075,520 bytes	
		Height	1.0 in (2.54 cm)	
		Width	3.5 in (8.9 cm)	
		Interface	68 pin LVD SCSI	
		Synchronous Transfer Rate (Maximum)	320 MB/s	
		Buffer	8 Mbytes	
		Seek Time (typical reads, includes controller overhead, including settling)	**Single Track**	0.3 msec
			Average	<4.5 msec
			Full-Stroke	<11.0 msec
		Rotational Speed	15,000 rpm	
		Logical Blocks	71,132,960	
		Operating Temperature	40° to 130°F (5° to 55°C)	
	73 GB	**Capacity**	73,407,865,856 bytes	
		Height	1.0 in (2.54 cm)	
		Width	3.5 in (8.9 cm)	
		Interface	68 pin LVD SCSI	
		Synchronous Transfer Rate (Maximum)	320 MB/s	
		Buffer	8 Mbytes	
		Seek Time (typical reads, includes controller overhead, including settling)	**Single Track**	0.3 msec
			Average	<4.5 msec
			Full-Stroke	<11.0 msec
		Rotational Speed	15,000 rpm	
		Logical Blocks	143,374,738	
		Operating Temperature	40° to 130°F (5° to 55° C)	
	146 GB	**Capacity**	146,815,737,856 bytes	
		Height	1.0 in (2.5 cm)	
		Width	3.5 in (8.9 cm)	
		Interface	68 pin LVD SCSI	
		Synchronous Transfer Rate (Maximum)	320 MB/s	
		Buffer	8 Mbytes	
		Seek Time (typical reads, includes controller overhead, including settling)	**Single Track**	0.3 msec
			Average	<4.5 msec
			Full-Stroke	<11.0 msec
		Rotational Speed	15,000 rpm	
		Logical Blocks	143,374,738	
		Operating Temperature	40° to 130°F (5° to 55°C)	

Technical Specifications - Removable Storage

USB Disk on Key	**Dimensions** (HxWxD)	0.9 x 0.7 x 3.9 in (2.3 x 1.8 x 9.8 cm)
	Weight	0.05 lb (0.02 kg)
	USB Specification	2.0
	Transfer Rate	Read-1023 KB/Sec; Write-850 KB/Sec
	Storage Media	Solid state flash memory, no moving parts
	Power Supply	USB Bus-powered, no external power required
	Capacity	256 MB

PS/2 OR USB Standard Keyboard	**Physical characteristics**	**Keys**	104, 105, 106, 107, 109 layout (depending upon country)
		Dimensions (L x W x H)	18.0 x 6.4 x 0.98 in (45.8 x 16.3 x 2.5 cm)
		Weight	2 lb (0.9 kg) minimum
	Electrical	**Operating voltage**	+ 5VDC ± 5%
		Power consumption	50-mA maximum (with three LEDs ON)
		ESD	CE level 4, 15-kV air discharge
		EMI - RFI	Conforms to FCC rules for a Class B computing device
		MicrosoftPC 99 - 2001	Functionally compliant
	Mechanical	**Languages**	38 available
		Keycaps	Low-profile design
		Switch actuation	55-g nominal peak force with tactile feedback
		Switch life	20 million keystrokes (using Hasco modified tester)
		Switch type	Contamination-resistant switch membrane
		Key-leveling mechanisms	For all double-wide and greater-length keys
		Cable length	6 ft (1.8 m)
		Microsoft PC 99 - 2001	Mechanically compliant
		Acoustics	43-dBA maximum sound pressure level
	Environmental	**Operating temperature**	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, six surfaces
		Non-operating shock	80 g, six surfaces
		Operating vibration	2-g peak acceleration
		Non-operating vibration	4-g peak acceleration
		Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
		Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence
	Operating system support	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4	
	Approvals	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC	
	Ergonomic compliance	ANSI HFS 100, ISO 9241-4, and TUVGS	
	Kit contents	Keyboard, keyboard software media, installation guide, warranty card, safety and comfort	
HP USB Smart Card Keyboard (ED707AA)	**Physical characteristics**	**Keys**	104, 105, 106, 107, 109 layout (depending upon country
		Form factor	USB basic Smart Card keyboard

Technical Specifications - Input/Output Devices

	Colors	Carbonite/Silver
	Dimensions (L x W x H)	18.2 x 6.3 x 1.3 in (46.3 x 16.1 x 3.3 cm)
	Weight	2 lb (0.9 kg) minimum
Electrical	**Operating voltage**	+ 5VDC ± 5%
	Power consumption	100-mA maximum (with four LEDs ON)
	System interface	USB Type A plug connector
	ESD	CE level 4, 15-kV air discharge
	EMI - RFI	Conforms to FCC rules for a Class B computing device
	MicrosoftPC 99 - 2001	Functionally compliant
Mechanical	**Languages**	30+ available
	Keycaps	Low-profile design
	Switch actuation	55-g nominal peak force with tactile feedback
	Switch life	20 million keystrokes (using Hasco modified tester)
	Switch type	Contamination-resistant switch membrane
	Key-leveling mechanisms	For all double-wide and greater-length keys
	Cable length	6 ft (1.8 m)
	Microsoft PC 99 - 2001	Mechanically compliant
	Acoustics	43-dBA maximum sound pressure level
Environmental	**Operating temperature**	50° to 122° F (10° to 50° C)
	Non-operating temperature	-22° to 140° F (-30° to 60° C)
	Operating humidity	10% to 90% (non-condensing at ambient)
	Non-operating humidity	20% to 80% (non-condensing at ambient)
	Operating shock	40 g, six surfaces
	Non-operating shock	80 g, six surfaces
	Operating vibration	2-g peak acceleration
	Non-operating vibration	4-g peak acceleration
	Drop (out of box)	26 in (66 cm) on carpet, six-drop sequence
	Drop (in box)	42 in (107 cm) on concrete, 16-drop sequence

Technical Specifications - Input/Output Devices

SMARTCARD function	**Support**	All ISO 7816 smart cards	
	Interface	Reads from and writes to all ISO7816-1, 2, 3, 4 memory and microprocessor smart cards (T=0, T=1)	
	Chipset	SCM STCII	
	Standard APIs supported	PC/SC, EMV2000, SET	
	Power	USB Port	
		Short circuit detection (protects smart card and reader)	
		Power supply compliant with ISO7816 and EMV (5V, 60 mA)	
		Supports 3-V and 5-V cards	
	Power consumption	250-mA maximum draw (50 mA for the keyboard with three LEDs ON and 200-mA maximum startup current using a high-current, 60-mA smart card)	
	Communication	**From card**	Programmable from 9,600 baud to 115,200 baud
		From computer	Up to 38,400 baud
	Landing mechanism	**Contact device**	Friction contact
		Card insertions rating	Up to 100,000 insertion cycles
	Interface modes	USB communications through USB port	
		SCM protocol	
		Automatic card insertion/removal detection	
	Reader performance interface	USB connection	
	Electro-magnetic standards	**Europe**	89/336/CEE guideline
		USA	USAFCC part 15
Operating system support	Microsoft® Windows® 2000, Windows XP Home, Windows XP Professional, xpe, ce.net, Linux, XP-64		
Approvals	CE-Mark, UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC, JITC, EMV2000, USB-IF		
Ergonomic compliance	ANSI HFS 100, ISO 9241-4, TUVGS		
Kit contents	Keyboard, I/O Security and Documentation CD, , warranty card		
Smart card compatibility	**HP**	HP ProtectTools Smart Card	
	American Express	Amex Blue	

Axalto (Schlumberger)	Cryptoflex 8K Cryptoflex 16K Cryptoflex 32K Cryptoflex 32K e-gate Cyberflex Access 64K Cyberflex Access 32K Cyberflex 32K e-gate Cyberflex 64K Cyberflex Palmera Payflex-S Payflex 1K Payflex 2K Payflex 4K Payflex 8K Prismera US DoD CAC
Cardlogix	CLXSU004KK4 CLXSU008KK5
Datakey	Model 300 Model 330
De La Rue	VisaCash
Gemplus	Gem Expresso GKK32K Gemclub Memo GemClub Micro GemXplore GemSafe
Infineon	SLE66C322P
SafLink (Litronic)	Forte
Sharp	Java Card
Oberthur	CosmopollIC v4 CosmopollIC v4.1 Cosmo ID-One GalatIIC v2.1 US DoD CAC
Memory Cards	
Atmel	AT24C01ASC AT24C02SC AT24C04SC AT24C08SC AT24C16SC AT24C32SC AT24C64SC AT24C128SC AT24C256SC AT24C512SC AT88SC153 AT88SC1608
Axalto (Schlumberger)	PrimeFlex Store 8K PrimeFlex Store 2K

	nfineon	SLE4406 SLE4406E SLE4406E SE SLE4418 SLE4428 SLE4432 SLE4436E SLE4442 SLE5536
	ISSI	IS23SC4418 IS23SC4428
	ST	14C02
	Telefonkarte	SLE4406 SLE4436 SLE5536
	XICOR	X24026

HP PS/2 Scroll Mouse	**Dimensions**	3.8 x 6.3 x 11.6 cm (1.5 x 2.5 x 4.6 in)	
	Weight	4.44 oz (126 g)	
	Environmental	**Operating temperature**	50° to 122° F (10° to 50° C)
		Non-operating temperature	-22° to 140° F (-30° to 60° C)
		Operating humidity	10% to 90% (non-condensing at ambient)
		Non-operating humidity	20% to 80% (non-condensing at ambient)
		Operating shock	40 g, 6 surfaces
		Non-operating shock	80 g, 6 surfaces
		Operating vibration	2 g peak acceleration
		Non-operating vibration	4 g peak acceleration
		Drop (out-of-box)	26 in (66 cm) on carpet, 6-drop sequence
		Drop (out-of-box)	1 m on asphalt tile over concrete, 6-drop sequence
	Electrical	**Operating voltage**	5 VDC ± 10%
		Power consumption	15 mA
		System consumption	PS/2 mini-din connector
		ESD	CE level 4, 15 kV air discharge
		EMI-RFI	Conforms to FCC rules for a Class B computing device
		Microsoft PC99 - 2001	Functionally compliant

Technical Specifications - Input/Output Devices

	Mechanical	**Resolution**	400 ± 20% DPI
		Tracking speed	10 in/s maximum
		Acceleration	100 in/s
		Switch actuation	65 g nominal peak force
		Switch life	1,000,000 operations (using Hasco modified tester)
		Switch type	Low force micro-switches
		Tracking mechanism life	155 mi (250 km) at average speed of 10 in/s
		Cable length	6 ft (1.8 m)
		Microsoft PC99 - 2001	Mechanically compliant
	Scroll wheel	**Width**	8 mm
		Diameter	0.99 in (25.2 mm)
		Maximum rotation speed	30 mm/s
		Switch type	Light force micro-switch
		Switch life	1 million operations
		Mechanical life	Minimum 200,000 revolutions
	Regulatory approvals	**Compliant**	UL, CSA, FCC, CE Mark, TUV, TUV GS, VCCI, BSMI, C-Tick, MIC
	Compatibility	**Operating system support**	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4

HP 2-button Optical Scroll Mouse (USB)	**Dimensions** (H x L x W)	1.5 x 4.5 x 2.5 in (3.8 x 11.6 x 6.3 cm)
	Weight	0.27 lb (0.12 kg)
	Cable length	72.8 in (185 cm)
	System requirements	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3 and 4

Technical Specifications - Input/Output Devices

HP Optical 3-Button Mouse (USB)	**Dimensions/Weight**	**Height**	1.5 in (3.76 cm)
		Length	4.5 in (11.56 cm)
		Width	2.4 in (6.19 cm)
		Weight	3.80 oz (108 g)
	Environmental	**Operating temperature**	32° to 104° F (0° to 40° C)
		Non-operating temperature	-4° to 140° F (-20° to 60° C)
		Operating humidity	10% to 90% (non condensing at ambient)
	Mechanical	**Tracking speed**	6 in/s Maximum
		Switch life	3,000,000 operations
		Switch type	Micro-switches
		Tracking mechanism life	155 miles (250 km) at average speed of 10 in/s
		Cable length	9.5 ft (2.9 m)

Spaceball 5000 USB (Windows XP only)	**Physical characteristics**	**Dimensions** (H x W x D)	3.0 x 6.0 x 8.4 in (7.6 x 15.2 x 21.3 cm)
		Ball Diameter	2.2 in (5.6 cm)
		Weight	2.1 lb (9.94 kg)
		Features	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw) Certified for leading CAD and DCC applications
	Environmental	**Operating temperature**	50° to 104° F (10° to 40° C)
		Non-operating temperature	43° to 140° F (6° to 60° C)
		Operating humidity	8% to 80% (non-condensing at ambient)
		Non-operating humidity	5% to 80% (non-condensing at ambient)
	Mechanical	**Buttons**	12 programmable (unshifted)
		Ball Force Range	0.5 - 8.2N/1.8 - 29.5 oz
		Ball Torque Range	0.085 – 0.33 oz-in. (6.91 Nmm)
		Resolution	10 bits
	Serial Specifications	**Connector**	USB 1.1 or greater
		Cable Length	12.8 ft. (3.9 m)
		Data Rate	USB model – 16 msec
		Flow Control	Xon/Xoff (on PS/2 model only)
	Software Drivers Available	**USB model**	Microsoft Windows XP Professional
	System Requirements	**Disk Space**	10 MB free disk space
	Regulatory Approvals	UL, cUL, EN 950, EN 60950, CSA, FCC, CE Mark, TUV, CISPR 22, EN 50082, IEC 1000 4-2, IEC 1000-4-3, AS/NZS, VCCI, BSMI, C-Tick	

Technical Specifications - Input/Output Devices

HP SpaceMouse Plus USB (Windows XP only)	**Physical characteristics**	**Dimensions** (H x W x D)	7.4 x 4.72 x 1.73 in (18.8 x 12.0 x 4.4 cm)
		Cap Diameter	2 x 6.5 x 6.6 mm
		Weight	1.5 lb (0.68 kg)
		Features	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw) Certified for leading CAD and DCC applications
	Environmental	**Operating temperature**	41° to 140° F (5° to 60° C)
		Non-operating temperature	-13° to 158° F (-25° to 70° C)
		Operating humidity	10 to 98 % RH (non-condensing)
		Non-operating humidity	10 to 98 % RH (non-condensing)
	Mechanical	**Buttons**	11 programmable (unshifted)
		Cap Force Range	0.2 N – 4.5 N
		Cap Torque Range	4 Nmm to 100 Nmm
		Resolution	8 bit
	USB Specifications	**Connector**	USB 1.1 or greater
		Cable Length	6.56 ft (2 m)
		Data Rate	16 msec
	Software Drivers Available	Microsoft Windows XP Professional	
	System Requirements	**Disk Space**	10 MB free disk space
	Regulatory Approvals	UL, cUL, EN 950, EN 60950, CSA, FCC, CE Mark, TUV, CISPR 22, EN 50082, IEC 1000 4-2, IEC 1000-4-3, AS/NZS, VCCI, BSMI, C-Tick	

1394a FireWire PCI card	**Device Interface Protocol**	IEEE-1394a	
	Data Rate	400 Mbps	
	Devices Supported	IEEE-1394 compliant devices	
	Bus Interface	PCI	
	Physical	Low profile PCI card with a full height bracket	
	Environmental	**Operating temperature**	41° to 95° F (5° to 35° C)
		Non-operating temperature	158° F (70° C) and above
		Relative humidity	10% to 90%
		Ports	2 rear and 2 front (depends on model of PC)
	Minimum System Requirements	Windows XP Professional, Windows XP Professional x64 Edition, Linux support with the HP Installer Kit for Linux Pentium II 266 or faster 32-MB RAM 1-GB Hard Drive CD-ROM drive Built in sound system	

Technical Specifications - Input/Output Devices

HP SpacePilot 3D USB Intelligent Controller (model EF390AA)	**Physical Characteristics**	**Dimensions** (L x W x H)	9.3 x 5.6 x 2.0 in (236 x 143 x 53 mm)
		Weight	1.875 lb (0.85 kg)
		Palmrest	Sculpted
	Mechanical	**Buttons**	21+ programmable speed keys 15 reprogrammable
		LCD Viewing Area	(W x H) 4.1 x 1.2 in (102 x 30 mm)
		Active Area	(W x H) 3.9 x 1.0 in (98 x 26 mm)
		Display Format	240 x 64
		Motion Controller	Six degrees of freedom motion control through the X, Y, Z axis (pitch, roll, yaw)
		Device Sensitivity	Adjustable to preference
	System Requirements	Intel Pentium 4 or AMD Athlon processor based system 20 megabytes free disk space for driver and plug-in installation (CD-ROM device required) USB 1.1 or 2.0	
	Operating System Supported	Microsoft Windows 2000 and XP	
	Regulatory Approvals	FCC, CE	

48X CD-ROM Drive	**Form Factor**	5.25-in, half-height, tray load	
	Mounting Orientation	Horizontal or vertical	
	Interface	ATAPI/EIDE	
	Dimensions (HxWxD)	1.63 x 5.83 x 7.27 in (4.13 x 14.6 x 18.5 cm)	
	Weight	1.76 lb (0.8 kg)	
	Data Transfer Rates - Read	Digital audio extraction (minimum) – 1,200 KB/s (8X) CD read – up to 7,200 KB/s (48X)	
	Media and Formats - Read	**CD Media**	stamped, CD-R, CD-RW (LS, HS, US)
		CD Capacities	180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)
		CD Formats	CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD
	Access Times (typical reads, including settling)	**CD-ROM Mode 1**	< 125 ms
		Full Stroke CD	< 210 ms
		Start-up Time (typical)	< 7 s (single session), < 30 s (multi-session)
		Stop Time (typical)	< 4 s
		Write Buffer Size	128 KB (minimum)
		Data Transfer Modes	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 0 (16.7 MB/s); UltraDMA Mode 2 (33.3 MB/s)
	Power	**Source**	Four-pin, DC power receptacle
		DC Power Requirement	5 VDC ± 5% - 100 mV ripple p-p
			12 VDC ± 5% - 200 mV ripple p-p
		DC Current	5 VDC - <1000 mA typical, < 1600 mA maximum
			12 VDC - < 600 mA typical, <1400 mA maximum
		Total Drive Power (standby mode)	< 2.5 Watt
	Audio Output	**Line-Out**	0.7 VRMS
		Signal-to-Noise Ratio	74 dB
		Channel Separation	65 dB
	Configuration Jumper Block	Master, slave, and cable select modes	
	Operating Conditions (all conditions non-condensing)	**Temperature**	41° to 122° F (5° to 50° C)
		Humidity	10% to 80%

	Certifications, Approvals	MMC-3 support, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B)
	Operating Systems Supported	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3
	Supplied Software	None

16X/48X DVD-ROM Drive with +R Read Support	**Height**	5.25-in, half-height, tray load	
	Interface Type	ATAPI/EIDE	
	Dimensions (W x H x D)	5.88 x 1.71 x 7.87 [max] in (149.5 x 43.25 x 200.0 [max] mm) (external, excluding bezel)	
	Disc Formats	DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0; DVD-RW version 1.0 and 1.1; DVD-R multi-border; DVD+RW; DVD+R ; CD-ROM Mode 1 and 2; CD-DA; CD-ROM XA Mode 2, Form 1 and 2; CD-extra; CD-text; CD-I Mode 2, Form 1 and 2; CD-I ready; video CD, CD-bridge; PhotoCD (single and multi-session); CD-R; CD-RW	
	Disc Capacity	**DVD-ROM**	4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R)
		CD-ROM	540 MB (Mode 1, 12 cm), 640 MB (Mode 2, 12 cm), 700 MB (80 minimum CD-R and CD-RW), 180 MB (8 cm)
	Access Times (typical reads, including settling)	**DVD-ROM Single Layer**	120 ms
		CD-ROM Mode 1	90 ms
		Full Stroke DVD	240 ms (seek)
		Full Stroke CD	160 ms (seek)
		Startup Time	< 10 seconds (typical)
		Stop Time	< 4 seconds
		Data Transfer Modes	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 3 (44.4 MB/s)
	Maximum Data Transfer Rates	**CD-ROM Read**	6000 KB/s (40X) Max
		DVD-ROM Read	21,600 KB/s (16X) Max
		Digital Audio Extraction	6000 KB/s (40X) Max

Technical Specifications - Optical Devices

	Power	**Source**	Four-pin, DC power receptacle
		DC Power Requirement	5 VDC ± 5% – 100 mV ripple p-p
			12 VDC ± 5% – 200 mV ripple p-p
		DC Current	5 VDC – <800 mA typical, < 1000 mA maximum
			12 VDC – < 870 mA typical, <1800 mA maximum
	Audio Output	**Line-Out**	0.7 VRMS
		Signal-to-Noise Ratio	85 dB
		Channel Separation	65 dB
	Configuration Jumper Block	Master, slave, and cable select modes	
	Data Interface Connector	40-pin, shrouded and keyed, flat ribbon	
	Operating Environmental (all conditions non-condensing)	**Temperature** (operating)	41° to 122° F (5° to 50° C)
		Relative Humidity (operating)	10% to 85%
		Maximum Wet Bulb Temperature (operating)	86° F (30° C)
	Certifications, Approvals	MMC II support, multi-read certification, Microsoft WHQL certification, ACA AS/NZS 3548 class B, CNS 13438, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992	
	Operating Systems Supported	Windows 2000, XP Professional, and XP Professional x64 Edition Red Hat Linux 7.2, 7.3 WS3 and WS4 Versions	
	Kit Contents	16X/40X DVD-ROM Drive, InterVideo WinDVD MPEG Movie Playback software, audio cable, and installation guide.	
HP 48X CD-RW	**Form Factor**	5.25-inch, half-height, tray-load	
	Mounting Orientation	Horizontal or vertical	
	Interface	ATAPI/EIDE	
	Dimensions (HxWxD)	1.63 x 5.75 x 7.27 [max] in (4.13 x 14.6 x 18.5 [max] cm) (external, excluding bezel)	
	Weight (max)	2.0 lb (0.9 kg)	

Read Only Disc Parameters	**Data Transfer Rates - Read**	**Digital audio extraction** (minimum) - 1,800 KB/s (12X)
		CD read - up to 7,200 KB/s (48X)
	Media and Formats - Read	**CD Media:** stamped; CD-R; CD-RW (LS, HS, US)
		CD Capacities: 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)
		CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD
Writeable Disc Parameters	**Data Transfer Rates - Write**	**CD-R write -** 2100 KB/s (14X) to 7200 KB/s (48X)
		CD-RW write - 600 KB/s (4X)
		CD-RW write (high speed) - 1500 KB/s (10X) to 1800 KB/s (12X)
		CD-RW write (ultra high speed) - 2400 KB/s (16X) to 4800 KB/s (32X)
	Media and Formats - Write	**CD Media:** CD-R; CD-RW (LS, HS, US)
		CD Capacities: 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)
		CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD
	Write Methods	Disc-at-once, session-at-once, track-at-once, incremental fixed and variable packet, multi-session
Access Times (typical reads, including settling)	**CD-ROM Mode 1**	< 125 ms
	Full Stroke CD	< 210 ms
	Start-up Time (typical)	< 7 s (single session), < 30 s (multi-session)
	Stop Time (typical)	< 4 s
	Write Buffer Size	2 MB
	Data Transfer Modes	PIO Mode 4 (16.6 MB/s); Multi-word DMA mode 2 (16.6 MB/s); UltraDMA Mode 2 (33.3 MB/s)

Technical Specifications - Optical Devices

	Power	**Source**	Four-pin, DC power receptacle
		DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p
			12 VDC ± 5%-200 mV ripple p-p
		DC Current	5 VDC (< 1000 mA typical, < 1600 mA maximum)
			12 VDC (< 600 mA typical, < 1400 mA maximum)
		Total Drive Power (standby mode)	< 2.5 Watt
	Audio Output	**Line-Out**	0.7 VRMS
		Signal-to-Noise Ratio	74 dB
		Channel Separation	65 dB
	Configuration Jumper Block	Master, slave, and cable select modes	
	Operating Conditions	**Temperature**	41° to 122° F (5° to 50° C)
		Humidity	10% to 90%10% to 90%
	Certifications, Approvals	MMC-3 support, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B)	
	Operating Systems Supported	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat Enterprise Linux Workstation 3	
	Supplied Software (for Windows XP)	Roxio Digital Media Plus: Create or copy CDs and DVDs, including music and data CDs, and data DVDs	
HP 48X CD-RW/DVD-ROM Combo Drive	**Form Factor**	5.25-inch, half-height, tray-load	
	Mounting Orientation	Horizontal or vertical	
	Interface	ATAPI/EIDE	
	Dimensions (HxWxD)	5.77 x 1.71 x 7.87 [max] in (14.66 x 4.34 x 20.0 [max] cm) (external, excluding bezel)	
	Weight (max)	2.6 lb (1.2 kg)	

Read Only Disc Parameters	**Data Transfer Rates - Read**	**CD read -** 7200 KB/s (48X) Max
		Digital audio extraction (minimum) - 1,800 KB/s (12X)
		DVD ROM read - 21,632 KB/s (16X) Max
	Media and Formats - Read	**CD Media**: stamped; CD-R; CD-RW (LS, HS, US)
		CD Capacities: 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)
		CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD
		DVD Media: stamped (single and double layer); DVD+R; DVD+RW; DVD+R DL; DVD-R; DVD-RW
		DVD Capacities: 4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R)
		DVD Formats: DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0; DVD-RW version 1.0 and 1.1; DVD-R multi-border ; DVD+R version 1.2 (including multi-session); DVD+R DL version 1.0; DVD+RW version 1.2
Writeable Disc Parameters	**Data Transfer Rates - Write**	**CD-R write** - 2100 KB/s (14X) to 7200 KB/s (48X)
		CD-RW write - 600 KB/s (4X)
		CD-RW write (high speed) - 1500 KB/s (10X) to 1800 KB/s (12X)
		CD-RW write (ultra high speed) **-** 2400 KB/s (16X) to 4800 KB/s (32X)
	Media and Formats - Write	**CD Media:** CD-R; CD-RW (LS, HS, US)
		CD Capacities: 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)
		CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD
	Write Methods	Disc-at-once, session-at-once, track-at-once, incremental fixed and variable packet, multi-session

Technical Specifications - Optical Devices

Access Times (typical reads, including settling)	**Random DVD**	< 140 ms
	Random CD	< 125 ms, (typical)
	Full Stroke DVD	< 250 ms
	Full Stroke CD	< 210 ms
	Startup Time (single)	< 7 seconds (typical)
	Startup Time (multi-session)	< 30 seconds (typical)
	Stop Time (typical)	< 4 s
	Cache Buffer	2 MB (minimum)
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44 Mbytes/s)
Power	**Source**	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p
		12 VDC ± 5%-200 mV ripple p-p
	DC Current	5 VDC (< 1000 mA typical, < 1600 mA maximum)
		12 VDC (< 600 mA typical, < 1400 mA maximum)
	Total Drive Power (standby mode)	< 2.5 Watt
Audio Output	**Line-Out**	0.7 VRMS
	Signal-to-Noise Ratio	74 dB
	Channel Separation	65 dB
Configuration Jumper Block	Master, slave, and cable select modes	
Data Interface Connector	40-pin, shrouded and keyed, flat ribbon	
Operating Conditions (all conditions non-condensing)	**Temperature**	41° to 122° F (5° to 50° C)
	Relative humidity	10% to 90%
	Maximum wet bulb temperature	86° F (30° C)
Certifications, Approvals	MMC-3 support, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B)	
Operating Systems Supported	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition, Red Hat WS3 and WS4 Versions	
Supplied Software (for Windows XP)	Roxio Cineplayer Movie Playback Roxio Digital Media Plus: Create or copy CDs and DVDs, including music and data CDs, and data DVDs	

16X DVD+/-RW, Dual-Layer, with LightScribe	**Form Factor**	5.25-inch, half-height, tray-load
	Orientation	Horizontal or vertical

Technical Specifications - Optical Devices

Direct Disc Labeling			
	Interface	ATAPI/EIDE	
	Dimensions (HxWxD)	5.9 x 1.7 x 7.9 in (15.0 x 4.4 x 20.0 cm)	
	Weight (maximum)	2.6 lb (1.2 kg)	
	Read Only Disc Parameters	**Data Transfer Rates - Read**	**DVD-ROM, DVD-video read -** 5-16X (6750 - 21,600 KB/s CAV)
			DVD-video playback, DVD+R, DVD+RW, DVD-R, DVD-RW - 4-8X (5400 - 10,800 KB/s CAV)
			CD-audio playback - 8x (1200 KB/s CLV)
			Digital audio extraction (minimum) **-** 12X (1,800 KB/s CAV)
			CD-ROM, CD-R, CD-RW, CD-Audio read - 16-40X (2400 to 6000 KB/s CAV)
		Media and Formats - Read	**CD Media:** stamped; CD-R; CD-RW (supports AM2) (LS, HS, US)
			CD Capacities: 180 MB (mode 2, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)
			CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD, UDF (1.02 and 1.50)
			DVD Media: stamped (single and double layer); DVD+R; DVD+RW; DVD+R DL; DVD-R; DVD-RW
			DVD Capacities: 4.7 GB (DVD-5), 8.54 GB (DVD-9), 9.4 GB (DVD-10), 14.1 GB (DVD-14), 17.0 GB (DVD-18), 3.95 GB (DVD-R version 1.0), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.0 and 1.1), 4.7 GB (DVD+RW), 4.7G (DVD+R), 1.46 GB (DVD+R, 8cm), 1.46 GB (DVD+RW, 8cm)
			DVD Formats: DVD-ROM (single and dual layer); DVD-video; DVD-R version 1.0 and 2.0 (including multi-border); DVD-RW version 1.0 and 1.1; DVD+R version 1.3 (including multi-session); DVD+R DL version 1.0; DVD+RW version 1.2

Writeable Disc Parameters	**Data Transfer Rates - Write**	**CD-R write** - 16-40X (2400-6000 KB/s CAV)
		CD-RW write - 4X (600 KB/s CLV)
		CD-RW write (high speed) **-** 10X (1500 KB/s CLV)
		CD-RW write (ultra high speed) **-** 16-24X (2400-3600 KB/s ZCLV)
		DVD+R - 6-16X (8100-21,600 KB/s CAV), 8x (10,800 KB/s ZCLV), 2.4-4x (3250-5400 KB/s CLV)
		DVD+R DL - 2.4 (3250 KB/s CLV)
		DVD+RW - 2.4-4X (3250-5400 KB/s CLV)
		DVD-R - 2-4X (2700-5400 KB/s CLV), 8X (10,800 KB/s ZCLV)
		DVD-RW - 2-4X (2700-5400 KB/s CLV)
	Media and Formats - Write	**CD Media:** CD-R (OBII Vol2.0 Rev 1.2), CD-RW (LS, HS, US)
		CD Capacities: 180 MB (mode 1, 8 cm); 540 MB (mode 1, 12 cm); 650 MB (mode 2, 12 cm); 700 MB (Mode 2, 12 cm, 80-minute)
		CD Formats: CD-DA, CD-ROM (Mode 1 and 2), CD-XA (Mode 2, Form 1 and 2), Photo CD (Single and Multi-session), Mixed Mode (Audio and Data combined), CD-I (Mode 2, Form 1 and 2, and CD-I Ready), CD-Extra, CD-Bridge, Video CD, UDF (1.02 and 1.50)
		DVD Media: DVD+R, DVD+R DL, DVD+RW, DVD-R, DVD-RW
		DVD Capacities: 4.7 GB (DVD-5), 8.54 GB (DVD-9), 4.7 GB (DVD-R version 2.0), 4.7 GB (DVD-RW version 1.1), 4.7 GB (DVD+RW version 1.3), 4.7G (DVD+R version 1.2)), 1.46 GB (DVD+R, 8cm), 1.46 GB (DVD+RW, 8cm)
		DVD Formats: DVD-R version 1.0 and 2.0 (including multi-border); DVD-RW version 1.0 and 1.1; DVD+R version 1.3 (including multi-session); DVD+R DL version 1.0; DVD+RW version 1.2
	Write Methods	Disc-at-once, session-at-once, track-at-once, incremental fixed and variable packet, multi-session

Technical Specifications - Optical Devices

LightScribe Direct Disc Labeling Parameters	**Media Supported**	**CD-R:** LightScribe Version 1.0
		DVD+R: LightScribe Version 1.0
	Resolution	**Dots per inch:** 600
		Tracks per inch: 500-1600 (mode dependent)
	Labeling Times	**Draft quality:** < 20 min
		Normal quality: < 28 min
		Best quality: < 36 min
Access Times (typical reads, including settling)	**Random DVD**	< 130 ms (typical)
	Random CD	< 120 ms (typical)
	Full Stroke DVD	< 240 ms
	Full Stroke CD	< 200 ms
	Startup Time (single)	< 7 seconds (typical)
	Startup Time (multi-session)	< 30 seconds (typical)
	Stop Time (typical)	< 4 s
	Cache Buffer	2 MB
	Data Transfer Modes	ATA PIO mode 4 (16.7 MB/s); ATA Multi-word DMA mode 2 (16.7 MB/s); ATA UltraDMA Mode 3 (44.4 MB/s) (default on most HP xw series workstations)
Power	**Source**	Four-pin, DC power receptacle
	DC Power Requirement	5 VDC ± 5%-100 mV ripple p-p
		12 VDC ± 5%-200 mV ripple p-p
	DC Current	5 VDC (< 1000 mA typical, < 1600 mA maximum)
		12 VDC (< 600 mA typical, < 1400 mA maximum)
	Total Drive Power (standby mode)	< 2.5 Watt
Audio Output	**Line-Out**	0.7 VRMS
	Signal-to-Noise Ratio	74 dB
	Channel Separation	65 dB
Operating Conditions (all conditions non-condensing)	**Temperature**	41° to 122° F (5° to 50° C)
	Relative humidity	10% to 90%
	Maximum wet bulb temperature	86° F (30° C)
Certifications, Approvals	MMC-4 compliant, multi-read compliant, Microsoft WHQL certification, ACA AS/NZS 3548 class B, BSMI CNS 13438, CE Mark, C.I.S.P.R. Pub 22, TUV or VDE EN60950, EN 55022, EN55024, EMKO EN60950, EN 60825-1, UL 60950, CSA C22.2 60950-2000, CFR 21 part 1040 class 1, CFR 47 C.I.S.P.R. Pub 22 Class B, DHHS/FDA, ANSI C63.4-1992 (FCC Class B), relevant parts of IEC 61000-4.	
Operating Systems Supported	Microsoft Windows XP Professional, Microsoft Windows XP Professional x64 Edition Red Hat Linux 7.3 WS3 and WS4 Versions (LightScribe labeling functionality not supported on Linux)	

Supplied Software (for Windows XP)	Roxio Cineplayer Movie Playback Roxio Digital Media Plus: Create or copy CDs and DVDs, including music and data CDs, and data DVDs Roxio MyDVD for DVD authoring **NOTE:** LightScribe Direct Disc Labeling is supported only on 32-bit Windows XP in the launch timeframe for the xw4300. Support for Windows XP Professional x64 Edition is anticipated to be available some time after the launch, and will require software updates. There is no support for LightScribe labeling under Linux. The drive will operate as a DVD writer under these other operating systems, but will not be available in software applications as a LightScribe "printer".

NOTE: This DVD writer kit does not include any software for burning DVDs on Linux. DVD burning is supported with the 'growisofs' command. CD burning is supported with the 'cdrecord' command. Red Hat Enterprise Linux WS 3 distribution includes both 'cdrecord' and 'growisofs'. Red Hat Linux 8, 9.0 distributions only include 'cdrecord'. Therefore DVD burning is only supported on WS 3.

Technical Specifications - Graphics

NVIDIA Quadro NVS 285 with TurboCache Technology PCIe Graphics	**Form Factor**	NVIDIA Quadro NVS 285 with TurboCache Technology 128MB PCIe Dual Head Low profile, both ATX and low profile brackets included
	Graphics Controller	Integrated Quadro 285 2D graphics processor unit (GPU)
	Bus Type	PCI-Express
	Memory	128 MB DDR (64 MB local frame buffer plus 64 MB of shared system memory via TurboCache technology) **NOTE:** The graphics card uses part of the total system memory (RAM) for graphics performance. System memory dedicated to graphics performance is not available for other use by other programs.
	Connectors	DMS-59 to dual-DVI Y-cable or dual-VGA Y-cable
	Dimensions	Low-profile, 2.586 x 6.6 in (6.57 x 16.76 cm)
	Overlay planes	One 16-bit Video overlay plane
	Multi-monitor support	Dual analog or digital monitors
	Maximum pixel clock	350 MHz
	RAMDAC	Dual 350 MHz (integrated)
	High-definition Video Processor (HDVP)	Full screen, full frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
	Available graphics drivers	Microsoft Windows 2000 and Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode) HP qualified drivers may be preloaded or available from the HP support Web site: http://www.hp.com/country/us/en/support.html?pageDisplay=drivers

NVIDIA Quadro FX 540 PCI-Express Graphics Card	**Form Factor**	ATX, 4.376" x 7.0" Single slot
	Graphics Controller	NVIDIA NV43GL
	Bus Type	PCI-Express x16, <75W power consumption
	RAMDAC	Dual 400 MHz integrated
	Memory	128 MB 275 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage 8.8 GB/sec graphics memory bandwidth
	Connectors	DVI-I + VGA + 10-pin HDTV Out (HD cable purchased separately)
	Multi-monitor support	Integrated analog display controller supporting a single analog display at 2048x1536 @ 75Hz, one digital display at 1600x1200 @ 60Hz.

Technical Specifications - Graphics

	Additional product features	128 KB BIOS 3.3V Flash ROM reprogrammable by SW Hardware accelerated Overlay Planes Hardware accelerated two-sided lighting Hardware accelerated antialiased points and lines 3D Volumetric Texture support Hardware accelerated Occlusion Culling Compliant with Microsoft/Intel PC2001 Workstation requirements Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications DDC2B+ Monitor support on all OS platforms ACPI Version 1.0b Power Management support (all modes)
	Shading architecture	Fully programmable GPU (OpenGL1.5/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution Optimized compilers for Cg, OpenGL shading language, and Microsoft HLSL
	Supported graphics APIs	OpenGL 1.5 ICD with immediate mode support for all OGL primitive types DirectX 9.0c
	Available graphics drivers	HP-tested: Microsoft Windows XP, Windows 2000, and Linux HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html.
	Maximum Resolution	DVI-I output - drives digital display at resolutions up to 1600x1200 @ 60Hz Internal 400MHz RAMDACs – drives dual analog display up to 2048x1536 @ 75Hz each
NVIDIA Quadro FX 1400 PCI-Express Graphics Controller	**Form Factor**	ATX, 4.376" x 8.5" Single slot
	Graphics Controller	NVIDIA NV41GL
	Bus Type	PCI-Express x16, <75W power consumption
	RAMDAC	Dual 400 MHz integrated
	Memory	128 MB 300 MHz DDR SDRAM unified frame buffer, Z-buffer and Texture storage 19.2 GB/s graphics memory bandwidth
	Connectors	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	Multi-monitor support	Dual integrated analog display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays.

Technical Specifications - Graphics

	Additional product features	128 KB BIOS 3.3V Flash ROM reprogrammable by SW Hardware accelerated Overlay Planes Hardware accelerated two-sided lighting Hardware accelerated antialiased points and lines Quad-buffered Stereo 3D Volumetric Texture support Hardware accelerated Occlusion Culling Scalable Link Interface (SLI) technology Compliant with Microsoft/Intel PC2001 Workstation requirements Video Timings compliant with VESA DMT 1.0 and VESA GTF 1.0 specifications DDC2B+ Monitor support on all OS platforms ACPI Version 1.0b Power Management support (all modes)
	Shading architecture	Fully programmable GPU (OpenGL1.5/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution Optimized compilers for Cg, OpenGL shading language, and Microsoft HLSL
	Supported graphics APIs	OpenGL 1.5 ICD with immediate mode support for all OGL primitive types DirectX 9.0c
	Available graphics drivers	HP-tested: Microsoft Windows XP, Windows 2000 and Linux HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html.
	Maximum Resolution	Dual DVI-I output – drives dual digital displays at resolutions up to 1900x1200 @ 60Hz Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 85Hz each
NVIDIA Quadro NVS 440 256 MB Graphics Controller	**Form Factor**	ATX
	Graphics Controller	2 nv43 2D graphics processor units (GPUs)
	VGA controller	Integrated into the Quadro GPU
	Bus Type	PCI-E x16
	RAMDAC	Dual 350 MHz
	Memory	256 MB DDR frame buffer and Texture storage (128MB per GPU)
	Connector	Two DMS-59
	Controller clock speed	250 MHz
	Color planes	32-bit color buffer
	Overlay planes	1 16-bit Video overlay plane
	Maximum pixel clock	350 MHz
	Multi-Monitor Support	Up to 4 analog or digital monitors
	Single DVI Support	Yes
	Dual DVI Support	Yes

Technical Specifications - Graphics

	High-definition Video Processor (HDVP)	Full-screen, full-frame video playback of HDTV and DVD content DVD-ready motion compensation for MPEG-2 Independent hardware color controls for video overlay Hardware color-space conversion (YUV 4:2:2 and 4:2:0) IDCT motion compensation 5-tap horizontal by 3-tap vertical filtering 8:1 up/down scaling
	Available graphics drivers	Microsoft Windows Vista Business 32 and 64, Microsoft Windows XP (Provides full native Dual View mode, Span or Big Desktop mode, and Clone mode) HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html.
NVIDIA Quadro FX 3450 Graphics Controller	**Form Factor**	ATX
	Graphics Controller	NVIDIA Quadro FX 3450 Workstation GPU
	Bus Type	PCI-Express x16
	Memory	256 MB 450 MHz GDDR3 SDRAM unified graphics memory
	Connectors	2 DVI-I (one dual-link/one single-link) analog/digital monitor outputs, 1 3-pin Mini DIN stereo output, DVI-I to VGA adapters included
	Multi-Monitor Support	Dual integrated display controllers supporting up to two analog displays at 2048 x 1536 @ 75 Hz on both displays or dual digital displays at 1920 x 1200 (single-link) and 3840 x 2400 (dual-link). NVIEW advanced multi-display desktop and application management seamlessly integrated into Microsoft Windows
	Architecture Features	256-bit memory interface 128-bit IEEE floating-point color precision 12-bit sub-pixel precision 65,536 fragment instruction 65,536 vertex instruction 3D volumetric textures Single-system powerwall 12 pixels per clock rendering engine Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes 3rd generation occlusion culling 16 textures per pixel in fragment programs Window ID clipping functionality Hardware accelerated line stippling OpenGL Quad-buffered stereo
	Shading Architecture	Fully programmable GPU (OpenGL 2.0/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution

Technical Specifications - Graphics

	High Level Shader Languages	Optimized compiler for Cg and Microsoft® HLSL OpenGL 2.0 and DirectX 9.0c support Open source compiler
	High-Resolution Antialiasing	12-bit subpixel sampling precision enhances AA quality Rotated-grid full-scene antialiasing (RG FSAA) 8x FSAA dramatically reduces visual aliasing artifacts or "jaggies" at resolution up to 1920x1200
	Display Resolution Support	Dual Link DVI- I output-drives digital displays at resolutions up to 3840 x 2400 @ 24 Hz Single Link DVI-I output drives digital displays at resolutions up to 1920 x 1200 @ 75 Hz Internal 400 MHz DACs - Two analog displays up to 2048 x 1536 @ 75 Hz each
	nView Architecture	Advanced multi-display desktop & application management seamlessly integrated into Microsoft Windows.
	Supported Graphics APIs	OpenGL 2.0 ICD with immediate mode support for all OGL primitive types DirectX 9.0c
	Available Graphics Drivers	Microsoft Windows XP, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site: http://welcome.hp.com/country/us/eng/software_drivers.html.
NVIDIA Quadro FX 4500 Graphics Controller	**Graphics Controller**	NVIDIA Quadro FX 4500 Workstation GPU
	Bus Type	PCI Express x16
	RAMDAC	Dual 400 MHz integrated
	Memory	512 MB GDDR3 SDRAM unified graphics memory
	Form Factor	ATX
	Connectors	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output, DVI-I to VGA adapters included
	Multi-Monitor Support	Dual integrated display controllers supporting up to 2048 x 1536 @ 75 Hz (analog) or 3840 x 2400 @ 41 Hz (digital) on both displays
	NVIDIA Quadro FX 4500 Architecture	256-bit memory interface 35.2GB/sec. memory bandwidth Full 128-bit floating point color precision 12-bit subpixel precision 65,536 fragment instruction 65,536 vertex instruction 3D volumetric textures Single-system powerwall 12 pixels per clock rendering engine Hardware accelerated antialiased points & lines Hardware OpenGL® overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware two-sided lighting 3rd-generation occlusion culling OpenGL quad-buffered stereo Hardware-Accelerated Pixel Read-Back

Technical Specifications - Graphics

	Shading Architecture	16 textures per pixel in fragment programs Window ID clipping functionality Hardware accelerated line stippling Fully programmable GPU (OpenGL2.0/DirectX 9.0c class) Long fragment programs (up to 65,536 instructions) Long vertex programs (up to 65,536 instructions) Looping and subroutines (up to 256 loops per vertex program) Dynamic flow control Conditional execution
	High Level Shader Languages	Optimized compiler for Cg and Microsoft HLSL OpenGL 2.0 and DirectX 9.0c support Open source compiler
	High-Resolution Antialiasing	12-bit subpixel sampling precision enhances AA quality Rotated-grid full-scene antialiasing (RG FSAA) 16x FSAA dramatically reduces visual aliasing artifacts or "jaggies" at resolution up to 1920 x 1200
	Display Resolution Support	Dual Dual Link DVI- I output-drives digital displays at resolutions up to 3840 x 2400 @ 41 Hz Internal 400 MHz DACs - Two analog displays up to 2048 x 1536 @ 75 Hz each
	nView Architecture	Advanced multi-display desktop & application management seamlessly integrated into Microsoft Windows.
	Supported Graphics APIs	OpenGL 2.0 ICD with immediate mode support for all OGL primitive types DirectX 9.0c
	Available Graphics drivers	Microsoft Windows XP, Linux - Full Open GL implementation, complete with NVIDIA and ARB extensions. HP qualified drivers may be preloaded or available from the HP support web site: http://welcome.hp.com/country/us/eng/software_drivers.html
ATI FireGL V3100 Graphics Card (PCI Express)	**Form factor**	ATX
	Graphics controller	RV370
	Bus type	PCI-Express x16
	Memory	128 MB 200MHz DDR unified frame buffer, Z-buffer and Texture storage
	Connectors	1 DVI-I analog/digital and 1 VGA analog monitor output
	Multi-monitor support	Dual integrated display controllers supporting up to 2048x1536 @ 85Hz on both displays
	RAMDAC	Dual 400 MHz integrated

Technical Specifications - Graphics

	Architecture features	128-bit memory interface 128-bit IEEE floating-point precision 24-bits per RGBA color precision 4-bit sub-pixel precision 2 parallel geometry engines 4 parallel pixel pipelines 2x/4x/6x FSAA Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware accelerated occlusion culling Hardware accelerated clip planes
	Shading architecture	Smartshader™ technology Programmable pixel and vertex shaders 16 textures per pass Pixel shaders up to 160 instructinos with 32-bit floating point precision for each RGBA component Multiple render target support Shadow volume rendering acceleration High precision 10-bit per channel frame buffer support
	Supported graphics APIs	OpenGL 1.5 DirectX 9.0
	Available graphics drivers	Windows XP Professional, Windows XP Professional x64 Edition, Linux Xfree86HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html.
	Maximum resolution	DVI-I output – drives digital display at resolutions up to 1600x1200 Internal 400MHz RAMDACs – drives dual analog displays up to 2048x1536 @ 85Hz each

ATI FireGL V5100 PCI-Express Graphics Controller	**Form Factor**	ATX
	Graphics Controller	RV423
	Bus Type	PCI-Express x16
	Memory	128 MB 350MHz DDR unified frame buffer, Z-buffer and Texture storage
	Connectors	2 DVI-I analog/digital monitor outputs, 1 3-pin Mini DIN stereo output
	Multi-monitor support	Dual integrated display controllers supporting up to two analog displays at 2048x1536 @ 85Hz on both displays.
	RAMDAC	Dual 400 MHz integrated

Technical Specifications - Graphics

Architecture features	256-bit memory interface 128-bit IEEE floating-point precision 24-bits per RGBA color precision 8-bit sub-pixel precision 6 parallel geometry engines 12 parallel pixel pipelines 2x/4x/6x FSAA Hardware accelerated antialiased points and lines Hardware OpenGL overlay planes Hardware accelerated two-sided lighting Hardware accelerated clipping planes Hardware accelerated occlusion culling Hardware accelerated clip planes Quad-buffered stereo
Shading architecture	Smartshader™ technology Programmable pixel and vertex shaders 16 textures per pass Pixel shaders up to 160 instructions with 32-bit floating point precision for each RGBA component Multiple render target support Shadow volume rendering acceleration High precision 10-bit per channel frame buffer support
Supported graphics APIs	OpenGL 1.5 DirectX 9.0
Available graphics drivers	HP-tested: Microsoft Windows XP, Windows 2000, and Linux HP qualified drivers may be preloaded or available from the HP support Web site: http://welcome.hp.com/country/us/eng/software_drivers.html.
Maximum Resolution	DVI-I output – drives digital displays at resolutions up to 1600x1200 Internal 400MHz RAMDAC – drives dual analog displays up to 2048x1536 @ 85Hz each

HP L1755 Flat Panel Monitor	**Panel**	**Type**	Active matrix, thin film transistor (TFT)
		Viewable Image Area (diagonal)	17 in (43.2 cm) maximum viewable
		Screen Opening (WxH)	13.4 x 10.7 in (33.9 x 27.2 cm)
		Viewing Angle (typical)	176 degrees horizontal/176 degrees vertical (10:1 minimum contrast ratio)
		Brightness (typical)	Up to 250 nits (cd/m^2)
		Contrast Ratio (typical)	Up to 1000:1 (typical)
		Response Rate (typical)	25 ms (typical rise + fall)
		Pixel Pitch	0.264 mm
	Video/Other Inputs	**Plug and Play**	Yes (supports VESA DDC2B; PC2001 compliant)
		Self Powered USB 2.0 Hub	One upstream, four downstream ports (cable included)
		Input Signal	Two connectors: one 15-pin mini D-sub analog VGA; and one DVI-I (VGA analog or digital)
		Input Impedance	75 ohms ± 2%
		Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green (activated through on-screen display)
		Video Cable	VGA to VGA, DVI-D to DVI-D, and DVI-I to VGA
		Video Cable Length	78 in (2.0 m)
	Signal Interface/ Performance	**Horizontal Frequency**	30 to 82 kHz
		Vertical Frequency	56 to 75 Hz
		Native Resolution	1280 x 1024 @ 60 Hz analog
			1280 x 1024 @ 60 Hz digital
		Maximum Resolution (Analog)	1280 x 1024 @ 75 Hz analog
		Maximum Resolution (Digital)	1280 x 1024 @ 75 Hz digital
		Preset VESA Graphic Modes (non-interlaced)	640 x 480 @ 60 Hz, 72 Hz, 75 Hz 720 x 400 @ 70 Hz
			800 x 600 @ 60 Hz, 72 Hz, 75 Hz
			1024 x 768 @ 60 Hz, 70 Hz, 75 Hz
			1280 x 1024 @ 60 Hz, 75 Hz
		Preset MAC Mode	832 x 624 @ 75 Hz
			1152 x 870 @75 Hz
		Preset VGA Mode	640 x 480 @ 60 Hz, 72 Hz
		Preset SUN Mode	1152 x 900 @ 76 Hz
		Fail Safe Mode	Yes (limits out of range signal messages)
		Maximum Pixel Clock Speed	140 MHz

	User Programmable Modes	Yes, 15
	Anti-Glare	Yes
	Anti-Static	Yes
	AssetControl	Yes (accessible on HP Compaq Business Desktops featuring Intelligent Manageability)
	Default Color Temperature	Yes (6500k, 9300k, SRGB, Custom User)
On Screen Display (OSD) **Controls**	**Buttons or Switches**	Power on/off; 3-button OSD; second level OSD buttons include dual-input switch, dedicated auto adjust switch
	Languages	English, Spanish, French, German, Italian, Japanese, Simplified Chinese
	User Controls	Size and positioning, contrast, brightness, clock, clock phase, selectable color temperature, serial number, mode displayed, sleep timer, input selection, factory reset, individual color contrast, full-screen resolution
Power	**Power Supply**	Auto-ranging, 90 to 265 VAC; internal power supply
	Input Power	100 ~ 240 VAC
	Nominal Current	1.5 A maximum
	Frequency	50 ~ 60 Hz
	Average	33 watts when displaying standard office software
	Typical Power Consumption	< 40 watts
	Maximum	< 60 watts
	Power Saving	< 2 W
	Off Mode	0 watts (when master power switch is in the off position)
	Power Cable Length	70 in (1.8 m); non-captive

Technical Specifications - Monitors

Mechanical	**Dimensions** (H x W x D)	**Unpacked with stand**	16.1 (minimum) to 21.2 (maximum) x 14.4 x 8.3 in (40.9 (minimum) to 42.2 (maximum) x 36.5 x 21.1 cm)
		Base Area (Footprint D x W)	8.3 x 12.2 in (21.1 x 30.9 cm)
		Panel only (without stand) (H x W x D)	11.8 x 14.4 x 2.9 in (30.1 x 40.9 x 7.3 cm)
	Weight	**Unpacked with stand**	14.7 lb (6.7 kg)
		Unpacked without stand	8.1 lb (3.7 kg)
		Packaged	20.2 lb (9.2 kg)
	Bezel Width	13 mm left and right, 14 mm top, and 15 mm bottom	
	Tilt Range	-5° to +35°	
	Swivel Range	± 50° horizontal swivel	
	Height Adjustable	Yes (5.1 in/13 cm adjustment range)	
	Pivot Rotation	Yes, 90 °	
	Base	Ships detached and is removable after installation	
Environmental	**Temperature – Operating**	41° to 95° F (5° to 35° C)	
	Temperature – Non-operating	-4° to 140° F (-20° to 60° C)	
	Humidity – Operating	20% to 80%	
	Humidity – Non-operating	5% to 95%	
	Altitude – Operating	0 to 13,000 ft (0 to 4,000 m)	
	Altitude – Non-operating	0 to 40,000 ft (0 to 12,192 m)	
Options	**HP Desktop Access Center – Part number: DK985A**	Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions. Sold separately. For more information, refer to the HP Desktop Access Center QuickSpec document.	
	HP Flat Panel Speaker Bar – Part number: PF804AA	Powered directly by the monitor, seamlessly attaches to the monitor's bezel to bring full multimedia support to select HP flat panel monitors. Features dual speakers with full sound range and external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec document.	

	HP Compaq 7000 Series Ultra-slim Desktop Integrated Work Center Stand – Part number: DL641B	Allows mounting of a 15-, 17- or 19-inch HP flat panel monitor and an HP Compaq dc7100 Ultra-slim Desktop PC on a single stand for the convenience of an "all-in-one" form factor. Sold separately. For more information, refer to this product's QuickSpec document
Other	**Accessories Included**	VGA to VGA cable, DVI-D to DVI-D cable, DVI-I to VGA cable, USB cable, user CD-ROM with Pivot Pro software
	Software	Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
	Software	HP Display LiteSaver feature lets you schedule Sleep mode at preset times to help protect the display against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.
	User Guide Languages	English, Latin America Spanish, Brazilian Portuguese, Danish, Dutch, Finnish, French, German, Italian, Norwegian, Swedish, Greek, Polish, Russian, Slovenian, Turkish, Simplified Chinese, Traditional Chinese, Korean, and Japanese
	Warranty Languages	English, Canadian French, Latin America Spanish, Brazilian Portuguese, Danish, Dutch, Finnish, French, German, Italian, Norwegian, Spanish, Swedish, Bahasa Indonesian, Simplified Chinese, Traditional Chinese, and Korean
	Color	Carbonite, two-tone carbonite and silver (EMEA only)
	VESA Mounting	Yes (swing arm/wall mount not included); base must be removed for mounting options)
	VESA External Mounting	Yes (standard 4 hole pattern, 100 mm)
	Kensington Lock-ready	Yes
Certification and Compliance	Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCC Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MPR-II Compliant, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification	

Technical Specifications - Monitors

	Compatibility	VESA Video Signal Standard (VSIS) Compliant video cards have been tested and proven compatible for use with the HP L1755 Flat Panel Monitor. Recommended for use with HP products.
	Service and Warranty	Limited three-year parts and repair labor, service provider labor, and on-site service. Next business day advanced exchange direct replacement service available during warranty period. Certain restrictions and exclusions apply. For details, contact HP Customer Support.

HP L1955 Flat Panel Monitor	**Panel**	**Type**	Active matrix, thin film transistor (TFT)
		Viewable Image Area (diagonal)	19 in (48.25 cm) maximum viewable
		Screen Opening (WxH)	14.9 x 12.0 in (38.0 x 30.5 cm)
		Viewing Angle (typical)	176 degrees horizontal/176 degrees vertical (10:1 minimum contrast ratio)
		Brightness (typical)	Up to 250 nits (cd/m^2)
		Contrast Ratio (typical)	Up to 1000:1 (typical)
		Response Rate (typical)	<16 ms (typical rise + fall)
		Pixel Pitch	0.294 mm
	Video/Other Inputs	**Plug and Play**	Yes (supports VESA DDC2B; PC2001 compliant)
		Self Powered USB 2.0 Hub	One upstream, four downstream ports (cable included)
		Input Signal	Two connectors: one 15-pin mini D-sub analog VGA; and one DVI-I (VGA analog or digital)
		Input Impedance	75 ohms ± 2%
		Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green (activated through on-screen display)
		Video Cable	VGA to VGA, DVI-D to DVI-D, and DVI-I to VGA
		Video Cable Length	78 in (2.0 m)

Technical Specifications - Monitors

Signal Interface/ Performance	**Horizontal Frequency**	30 to 82 kHz
	Vertical Frequency	56 to 75 Hz
	Native Resolution	1280 x 1024 @ 75 Hz analog
		1280 x 1024 @ 60 Hz digital
	Maximum Resolution (Analog)	1280 x 1024 @ 75 Hz analog
	Maximum Resolution (Digital)	1280 x 1024 @ 75 Hz digital
	Preset VESA Graphic Modes (non-interlaced)	640 x 480 @ 60 Hz, 72 Hz, 75 Hz
		720 x 400 @ 70 Hz
		800 x 600 @ 60 Hz, 72 Hz, 75 Hz
		1024 x 768 @ 60 Hz, 70 Hz, 75 Hz
		1280 x 1024 @ 60 Hz, 75 Hz
	Preset MAC Mode	832 x 624 @ 75 Hz
		1152 x 870 @75 Hz
	Preset VGA Mode	640 x 480 @ 60 Hz, 72 Hz
	Preset SUN Mode	1152 x 900 @ 76 Hz
	Fail Safe Mode	Yes (limits out of range signal messages)
	Maximum Pixel Clock Speed	140 MHz
	User Programmable Modes	Yes, 15
	Anti-Glare	Yes
	Anti-Static	Yes
	AssetControl	Yes (accessible on HP Compaq Business Desktops featuring Intelligent Manageability)
	Default Color Temperature	Yes (6500k, 9300k, SRGB, Custom User)
On Screen Display (OSD) **Controls**	**Buttons or Switches**	Power on/off; 3-button OSD; second level OSD buttons include dual-input switch, dedicated auto adjust switch
	Languages	English, Spanish, French, German, Italian, Japanese, Simplified Chinese
	User Controls	Size and Positioning
		Contrast
		Brightness
		Clock, Clock Phase
		Selectable Color Temperature
		Serial Number
		Mode Displayed
		Sleep Timer
		Input Selection
		Factory Reset
		Individual Color Contrast
		Full-screen Resolution

Technical Specifications - Monitors

Power	**Power Supply**	Auto-ranging, 90 to 265 VAC; internal power supply	
	Input Power	100 ~ 240 VAC	
	Nominal Current	1.5 A maximum	
	Frequency	50 ~ 60 Hz	
	Average	33 watts when displaying standard office software	
	Typical Power Consumption	< 40 watts	
	Maximum	< 60 watts	
	Power Saving	< 2 watts	
	Off Mode	0 watts (when master power switch is in the off position)	
	Power Cable Length	70 in (1.8 m); non-captive	
Mechanical	**Dimensions** (H x W x D)	**Unpacked with stand**	16.8 (minimum) to 22.3 (maximum) x 15.9 x 8.3 in (42.7 (minimum) to 56.6 (maximum) x 40.4 x 21.1 cm)
		Base Area (Footprint D x W)	8.3 x 12.2 in (21.1 x 30.9 cm)
		Panel only (without stand) (H x W x D)	13.2 x 15.9 x 3.1 in (33.5 x 40.4 x 7.9 cm)
	Weight	**Unpacked with stand**	16.5 lb (7.5 kg)
		Unpacked without stand	10.5 lb (4.75 kg)
		Packaged	23.5 lb (10.7 kg)
	Bezel Width	13 mm left and right, 14 mm top, and 15 mm bottom	
	Tilt Range	-5° to +35°	
	Swivel Range	± 50° horizontal swivel	
	Height Adjustable	Yes (5.1 in/13 cm adjustment range)	
	Pivot Rotation	Yes, 90 °	
	Base	Ships detached and is removable after installation	
Environmental	**Temperature – Operating**	41° to 95° F (5° to 35° C)	
	Temperature – Non-operating	-4° to 140° F (-20° to 60° C)	
	Humidity – Operating	20% to 80%	
	Humidity – Non-operating	5% to 95%	
	Altitude – Operating	0 to 13,000 ft (0 to 4,000 m)	
	Altitude – Non-operating	0 to 40,000 ft (0 to 12,192 m)	

Options	**Desktop Access Center**	Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions. Sold separately; part number DK985A. For more information, refer to the HP Desktop Access Center QuickSpecs.
	HP Flat Panel Speaker Bar	Powered directly by the monitor, seamlessly attaches to the monitor's bezel to bring full multimedia support to select HP flat panel monitors. Features dual speakers with full sound range and external jack for headphones. Sold separately, part number PF804AA. For more information, refer to the HP Flat Panel Speaker Bar QuickSpecs.
Other	**Accessories Included**	VGA to VGA cable, DVI-D to DVI-D cable, DVI-I to VGA cable, USB cable, user CD-ROM with Pivot Pro software
	Software	Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
	Software	HP Display LiteSaver feature lets you schedule Sleep mode at preset times to help protect the display against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.
	User Guide Languages	English
	Warranty Languages	English
	Color	Carbonite, two-tone carbonite and silver (EMEA only)
	VESA Mounting	Yes (swing arm/wall mount not included); base must be removed for mounting options)
	VESA External Mounting	Yes (standard 4 hole pattern, 100 mm)
	Kensington Lock-ready	Yes
Certification and Compliance	Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 13406-2 Compliant (Pixel Defect Guidelines), Mexican NOM Approval, MPR-II Compliant, PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 99 or 03 depending on region (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft® Windows® Certification	

	Compatibility		VESA Video Signal Standard (VSIS) Compliant video cards have been tested and proven compatible for use with the HP L1955 Flat Panel Monitor. Recommended for use with HP products.
	Service and Warranty		Limited three-year parts and repair labor, service provider labor, and on-site service. Next Business Day advanced exchange direct replacement service available during warranty period. Certain restrictions and exclusions apply. For details, contact HP Customer Support.
HP Flat Panel Monitor L2035	**Panel**	**Type**	20-inch Active Matrix TFT (thin film transistor)
		Viewable Image Area (diagonal)	20.1 in (51 cm)
		Screen Opening (W x H)	16.2 x 12.17 in (41.1 x 30.9 cm)
		Viewing Angle (typical)*	Up to 170° H/170° V (10:1 minimum contrast ratio)
		Brightness (typical*	Up to 250 nits (cd/m^2)
		Contrast Ratio (typical)*	Up to 400:1
		Response Rate (typical)*	16 ms (typical, rise + fall)
		Pixel Pitch	0.255 mm
		*All specifications are provided by the component manufacturers. Performance specifications represent the highest specification of all HP's component manufacturers' typical level specifications for performance. Actual performance may vary either higher or lower.	
	On Screen Display (OSD) **Controls**	**Buttons or Switches**	PiP (Picture in Picture), Input select, auto adjust, OSD up, OSD down, OSD menu select, power
		Languages	English, French, German, Spanish, Italian
		User Controls	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, video picture-in-picture (size and position), input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset

Technical Specifications - Monitors

Signal Interface/ Performance	**Horizontal Frequency**	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)
	Vertical Frequency	48 to 85 Hz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)
	Graphics Controller	Pixelworks PW171
	Native Resolution	1600 x 1200 @ 60 Hz (recommended)
	Preset VESA Graphic Modes (non-interlaced)	1600 x 1200 @ 60 Hz, 75 Hz (VGA input)
		1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz
		1280 x 960 @ 60 Hz
		1152 x 900 @ 66 Hz
		1024 x 768 @ 60 Hz, 75 Hz, 85 Hz
		800 x 600 @ 60 Hz, 85 Hz
		640 x 480 @ 60 Hz, 75 Hz, 85 Hz
	Text Mode	720 x 400 @ 70 Hz
	Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
	Sun Mode	1152 x 900 @ 66 Hz
	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)
	User Programmable Modes	Yes, 10
	Anti-Glare	Yes
	Anti-Static	Yes
	Default Color Temperature	6500 K
Video Input	**Plug and Play**	Yes
	Input Signal	Four connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, and one s-video
	Input Impedance	75 ohms ± 10%
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green
	Video Cable	VGA to VGA; VGA to DVI-I; DVI-D to DVI-I
	Video Cable Length	5.9 ft (1.8 m)
Power	**Input Power**	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz
	Frequency	47.5 to 63 Hz
	Maximum	< 75 W
	Power Saving	< 5 W
	Power Cable Length	5.9 ft (1.8 m)

Technical Specifications - Monitors

Mechanical	**Dimensions** (H x W x D)	**Unpacked with stand**	17.36 to 20.9 x 17.8 x 8.27 in (44.1 to 53.1 x 45.2 x 21.0 cm)
		Unpacked without stand (head only)	14.29 x 17.8 x 3.19 in (36.3 x 45.2 x 8.1 cm)
		Packaged	11.5 x 21.9 x 23.9 in (29.2 x 55.6 x 60.6 cm)
	Weight	**Unpacked**	With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)
		Packaged	26.9 lb (12.2 kg)
	Tilt Range	-5° to + 25° vertical	
	Swivel Range	-35° to + 35°	
	Height Adjustable	Yes, range 3.54 in (9.0 cm)	
	Pivot Rotation	Yes	
	Base	Attached	
Environmental	**Temperature – Operating**	46° to 95° F (10° to 35° C)	
	Temperature – Non-operating	6° to 140° F (-10° to 60° C)	
	Humidity – Operating	20% to 80% non-condensing	
	Humidity – Non-operating	5% to 85%	
	Altitude – Operating	+12,000 ft (+3,657.6 m)	
	Altitude – Non-operating	+40,000 ft (+12,192 m)	
Options	**HP Desktop Access Center**	Sold separately, the HP Desktop Access Center features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions; part number DK985A. For more information, refer to the HP Desktop Access Center QuickSpecs.	

Technical Specifications - Monitors

	Other	**Accessories Included**	VGA to VGA cable – connects the graphic card's VGA analog connector to the monitor's input #1 (VGA analog) connector VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector
		User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
		Warranty Languages	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
		Color	Carbonite/Silver
		VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
		Kensington Lock-Ready	Yes
	Certification and Compliance	Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, *Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Windows Certification (Microsoft® Windows® 98, Microsoft Windows 2000, and Microsoft Windows XP) * Energy Star Compliant available summer 2004.	
	Compatibility	Compatible with platforms using the VESA standard video modes and HP Compaq Business Desktops d500, d300, and d200 Series, Compaq Evo Desktops, and HP Workstations	
	Service and Warranty	Limited three years parts, labor, and on-site service, including backlight. Availability varies by region. Certain restrictions and exclusions apply. Consult HP Customer Service for details.	
HP Flat Panel Monitor LP2065	**Panel**	**Type**	20-inch Active Matrix TFT (thin film transistor)
		Viewable Image Area (diagonal)	20.1 in (51 cm)
		Screen Opening (W x H)	16.2 x 12.17 in (41.1 x 30.9 cm)
		Viewing Angle (typical)*	Up to 178° horizontal/178° vertical (10:1 minimum contrast ratio)

	Brightness (typical*	Up to 300 nits (cd/m2)
	Contrast Ratio (typical)*	Up to 800:1
	Response Rate (typical)*	8 ms (gray to gray), 16 ms (rise + fall)
	Pixel Pitch	0.255 mm
	Backlight Lamp Life (to half brightness)	45K hours
On Screen Display (OSD) **Controls**	**Buttons or Switches**	Input select, auto adjust/OSD up, OSD down, OSD menu select, power
	Languages	English, French, German, Spanish, Italian, Dutch, and Japanese
	User Controls	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, input selection, image control (including scaling), and factory reset
Signal Interface/ Performance	**Horizontal Frequency**	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input for modes with pixel clock less than 157 MHz)
	Vertical Frequency	48 to 85 Hz (VGA input); 30 to 92 KHz (DVI input for modes with pixel clock less than 157 MHz)
	Native Resolution	1600 x 1200 @ 60 Hz (recommended)
	Preset VESA Graphic Modes (non-interlaced)	1600 x 1200 @ 60 Hz, 75 Hz (VGA input) 1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz 1280 x 960 @ 60 Hz 1152 x 900 @ 66 Hz 1024 x 768 @ 60 Hz, 75 Hz, 85 Hz 800 x 600 @ 60 Hz, 85 Hz 640 x 480 @ 60 Hz, 75 Hz, 85 Hz
	Text Mode	720 x 400 @ 70 Hz
	Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
	Sun Mode	1152 x 900 @ 66 Hz
	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)
	User Programmable Modes	Yes, 10
	Anti-Glare	Yes
	Anti-Static	Yes
	Default Color Temperature	6500 K

Technical Specifications - Monitors

Video Input	**Plug and Play**	Yes	
	Input Signal	Four connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, and one s-video	
	Self Powered USB 2.0 Hub	One upstream, four downstream ports (cable included)	
	Input Signal	Two DVI-I connectors (dual VGA analog or dual digital input possible)	
	Input Impedance	75 ohms ± 10%	
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	
	Video Cable	Two VGA to DVI-I; two DVI-D to DVI-I	
	Video Cable Length	5.9 ft (1.8 m)	
Power	**Input Power**	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz	
	Frequency	47.5 to 63 Hz	
	Typical Power Consumption	55 watts (without USB ports); 70 watts (USB ports fully loaded)	
	Maximum	< 75 W	
	Power Saving	< 2 watts	
	Power Cable Length	5.9 ft (1.8 m)	
Mechanical	**Dimensions** (H x W x D)	**Unpacked with stand**	16.7 to 21.8 x 17.4 x 8.67 in (42.5 to 55.5 x 44.3 x 22.0 cm)
		Unpacked w/o stand (head only)	13.58 x 17.4 x 3.42 in (34.5 x 44.3 x 8.7 cm)
		Packaged	11.77 x 22.2 x 16.77 in (29.9 x 56.4 x 42.6 cm)
	Weight	**Unpacked**	With stand: 20.28 lb (9.2 kg); Without stand: 12.35 lb (5.6 kg)
		Packaged	26.3 lb (11.95 kg)
	Tilt Range	-5° to + 25° vertical tilt	
	Swivel Range	-45° to + 45°	
	Height Adjustable	Yes, range 5.1 in (13.0 cm)	
	Pivot Rotation	Yes	
	Base	Detachable, ships attached	

Environmental	**Temperature – Operating**	46° to 95° F (10° to 35° C)
	Temperature – Non-operating	6° to 140° F (-10° to 60° C)
	Humidity – Operating	20% to 80% non-condensing
	Humidity – Non-operating	5% to 85%
	Altitude – Operating	+12,000 ft (+3,657.6 m)
	Altitude – Non-operating	+40,000 ft (+12,192 m)
Options	**HP Silver Flat Panel Speaker Bar - Part number: EE418AA**	Powered directly by the monitor or the PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and external jack for headphones. Sold separately. For more information, refer to the HP Silver Flat Panel Speaker Bar QuickSpec.
Other	**Accessories Included**	VGA to DVI-I cable **–** connects the graphic card's VGA connector to the monitor's input #1 or 2 (DVI-I analog) connector. DVI-D to DVI-I cable **–** connects the graphic card's DVI-D digital connector to the monitor's input #1 or #2 (DVI-I digital) connector.
	User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	Software	HP Display Assistant Utility makes it possible to adjust displays settings through the PC using two-way communication via DDCI. HP Display Lite Saver allows ability to power up and down display at predetermined hours of the day to safe power and backlight life. Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese.
	User Guide Languages	English
	Warranty Languages	English
	Color	Carbonite/Silver
	VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)

		Kensington Lock-Ready	Yes
	Certification and Compliance		Canadian Requirements/CSA, CE Marking, CISPR Requirements, , Energy Star Compliant, FCC Approval, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval,, MPR-II Compliant, PC2001 Compliant, PC99 Certified, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification (Microsoft Windows 98, Microsoft Windows 2000, and Microsoft Windows XP)
	Compatibility		Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
	Service and Warranty		Three years parts, labor, and on-site service. 24-hour 365-day 1-800 technical support. Replacement options include 2nd business day on-site service or next business day direct replacement. With direct replacement, HP will ship a replacement display product directly to you. Using the shipping labels provided, return your failed display to HP. Certain restrictions and exclusions apply. For details, contact HP Customer Support.
HP Flat Panel Monitor L2335	**Panel**	**Type**	23-inch Active Matrix TFT (thin film transistor)
		Viewable Image Area (diagonal)	23 in (58.4 cm)
		Screen Opening (W x H)	19.53 x 12.24 in (49.6 x 31.1 cm)
		Viewing Angle (typical)*	Up to 170° H/170° V (10:1 minimum contrast ratio)
		Brightness (typical)*	Up to 250 nits (cd/m^2)
		Contrast Ratio (typical)*	Up to 500:1
		Response Rate (typical)*	16 ms (typical, rise + fall)
		Pixel Pitch	0.258 mm
		* All specifications are provided by the component manufacturers. Performance specifications represent the highest specification of all HP's component manufacturers' typical level specifications for performance. Actual performance may vary either higher or lower.	
	On Screen Display (OSD) **Controls**	**Buttons or Switches**	PiP (Picture in Picture), Input Select, Auto Adjust, OSD Up, OSD Down, OSD Menu Select, Power
		Languages	English, French, German, Spanish, Italian
		User Controls	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, video picture-in-picture (size and position), input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset

Technical Specifications - Monitors

Signal Interface/ Performance	**Horizontal Frequency**	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)
	Vertical Frequency	48 to 85 Hz (VGA and DVI input)
	Graphics Controller	Pixelworks PW172
	Native Resolution	1920 x 1200 @ 60 Hz (recommended)
	Preset VESA Graphic Modes (non-interlaced)	1920 x 1200 @ 60Hz
		1600 x 1200 @ 60 Hz, 75 Hz
		1280 x 1024 @ 60 Hz, 75Hz, 85 Hz
		1280 x 960 @ 60 Hz
		1152 x 900 @ 66 Hz
		1024 x 768 @ 60 Hz, 75 Hz, 85 Hz
		800 x 600 @ 60 Hz, 75Hz
		640 x 480 @ 60 Hz, 75 Hz
	Text Mode	720 x 400 @ 70 Hz
	Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
	Sun Mode	1152 x 900 @ 66 Hz
	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)
	User Programmable Modes	Yes, 10
	Anti-Glare	Yes
	Anti-Static	Yes
	Default Color Temperature	6500 K
Video Input	**Plug and Play**	Yes
	Input Signal	Five connectors, including one 15-pin mini D-sub VGA, one DVI-I (VGA analog and digital input), one composite video, one s-video, component video
	Input Impedance	75 ohms ± 10%
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green
	Video Cable	VGA to VGA; VGA to DVI-I; DVI-D to DVI-I
	Video Cable Length	5.9 ft (1.8 m)
Power	**Input Power**	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz
	Frequency	47.5 to 63 Hz
	Maximum	< 100 W
	Power Saving	< 5 W
	Power Cable Length	5.9 ft (1.8 m)

Technical Specifications - Monitors

Mechanical	**Dimensions** (H x W x D)	**Unpacked**	17.36 (min) to 20.9 (max) x 21.46 x 8.27 in (44.1 (min) to 53.1 (max) x 54.5 x 21.0 cm)
		Unpacked withou stand (head only)	14.57 x 21.46 x 3.35 in (37.0 x 54.5 x 8.5 cm)
		Packaged	11.5 x 25.75 x 23.86 in (29. 2 x 65.4 x 60.6 cm)
	Weight	**Unpacked**	22.27 lb (10.1 kg)
		Packaged	30.87 lb (14.0 kg)
	Tilt Range	-5° to + 25° vertical	
	Swivel Range	-35° to + 35°	
	Height Adjustable	Yes, range 3.54 in (9.0 cm)	
	Pivot Rotation	Yes	
	Base	Attached	
Environmental	**Temperature – Operating**	46° to 95° F (10° to 35° C)	
	Temperature – Non-operating	6° to 140° F (-10° to 60° C)	
	Humidity – Operating	20% to 80% non-condensing	
	Humidity – Non-operating	5% to 85%	
	Altitude – Operating	+12,000 ft (+3,657.6 m)	
	Altitude – Non-operating	+40,000 ft (+12,192 m)	
Options	**HP Desktop Access Center**	Sold separately, the HP Desktop Access Center Features integrated microphone/headset jacks, dual function headset for phone/PC support, a MultiBay slot for adding an optical drive (sold separately), and four USB ports for easy integration of third-party digital solutions; part number DK985A. For more information, refer to the HP Desktop Access Center QuickSpecs.	

	Other	**Accessories Included**	VGA to VGA cable – connects the graphic card's VGA analog connector to the monitor's input #1 (VGA analog) connector VGA to DVI-I cable – connects the graphic card's VGA connector to the monitor's input #2 (DVI-I analog) connector DVI-D to DVI-I cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector
		User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
		Warranty Languages	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
		Color	Carbonite/silver
		VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
		Kensington Lock-Ready	Yes
	Certification and Compliance	Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, *Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Windows Certification (Microsoft® Windows® 98, Microsoft Windows 2000, and Microsoft Windows XP). * Energy Star Compliant available summer 2004.	
	Compatibility	Compatible with platforms using the VESA standard video modes and HP Compaq Business Desktops d500, d300, and d200 Series, Compaq Evo Desktops, and HP Business Desktops d300 series.	
	Service and Warranty	Limited three years parts, labor, and on-site service, including backlight. Availability varies by region. Certain restrictions and exclusions apply. Consult HP Customer Service for details.	
HP Flat Panel Monitor LP2465	**Panel**	**Type**	24-inch Active Matrix TFT (thin film transistor)
		Viewable Image Area (diagonal)	24 in (60.96 cm)
		Screen Opening (W x H)	20.47 x 12.83 in (52.0 x 32.6 cm)
		Viewing Angle (typical)*	178° H/ 178° V (10:1 minimum contrast ratio)

	Brightness (typical)*	500 nits (cd/m^2)
	Contrast Ratio (typical)*	1000:1
	Response Rate (typical)*	8 ms (typical gray to gray)
	Pixel Pitch	0.270 mm
	Backlight Lamp Life (to half brightness)	50K hours
	*Response time 13 ms rise and fall, 6 ms gray to gray.	
On Screen Display (OSD) **Controls**	**Buttons or Switches**	Input Select, Auto Adjust, OSD Up, OSD Down, OSD Menu Select, Power
	Languages	English, French, German, Spanish, Italian, Japanese, Dutch
	User Controls	Brightness, contrast, positioning, color temperature, individual color control, serial number display, full screen resolutions, clock, clock phase, input selection (includes separate direct access key for dedicated swap between inputs 1 and 2), factory reset
Signal Interface/ Performance	**Horizontal Frequency**	30 to 94 kHz (VGA input); 30 to 92 KHz (DVI input) (for modes with pixel clock less than 157 MHz)
	Vertical Frequency	48 to 85 Hz (VGA and DVI input)
	Native Resolution	1920 x 1200 @ 60 Hz (recommended) (native aspect ratio of 16:10)
	Preset VESA Graphic Modes (non-interlaced)	1920 x 1200 @ 60 Hz 1600 x 1200 @ 60 Hz, 75 Hz 1280 x 1024 @ 60 Hz, 75 Hz, 85 Hz 1280 x 960 @ 60 Hz 1152 x 900 @ 66 Hz 1024 x 768 @ 60 Hz, 75 Hz, 85 Hz 800 x 600 @ 60 Hz, 75 Hz 640 x 480 @ 60 Hz, 75 Hz
	Text Mode	720 x 400 @ 70 Hz
	Mac Mode	1152 x 870 @ 75 Hz and 832 x 624 @ 75 Hz
	Sun Mode	1152 x 900 @ 66 Hz
	Maximum Pixel Clock Speed	202 MHz (VGA input); 162 MHz (DVI input)
	User Programmable Modes	Yes, 20
	Anti-Glare	Yes
	Anti-Static	Yes
	Default Color Temperature	6500 K

Technical Specifications - Monitors

Video/Other Inputs	**Plug and Play**	Yes	
	Self Powered USB 2.0 Hub	One upstream, four downstream ports (located on side of monitor, cable included)	
	Input Signal	Two DVI-I (VGA analog and digital) inputs	
	Input Impedance	75 ohms ± 10%	
	Sync Input	Separate sync (HSYNC/VSYNC); composite sync, Sync on Green	
	Video Cable	VGA to DVI-I; DVI-D to DVI-D	
	Video Cable Length	5.9 ft (1.8 m)	
Power	**Input Power**	Auto-Ranging, 90 to 132 VAC and 195 to 265 VAC; internal power supply, 50 Hz/60 Hz	
	Frequency	47.5 to 63 Hz	
	Typical Power Consumption	75 watts	
	Maximum	< 110 watts	
	Power Saving	< 2 watts	
	Power Cable Length	6.2 ft (1.9 m)	
Mechanical	**Dimensions** (H x W x D)	**Unpacked w/ stand**	14.6 (min) to 19.7 (max) x 22 x 9.1 in (37.1 (min) to 50.1 (max) x 55.4 x 23.2 cm)
		Unpacked w/o stand (head only)	14.4 x 22 x 3.7 in (36.6 x 55.84 x 9.2 cm)
		Packaged	11.7 x 22.1 x 25.6 in (29.8 x 56.0 x 65.1 cm)
	Weight	**Unpacked**	23.6 lbs (10.7 kg)
		Packaged	23.6 lbs (10.7 kg)
	Tilt Range	-5° to + 25° vertical	
	Swivel Range	-45° to + 45°	
	Height Adjustable	Yes, range 5.1 in (130 mm)	
	Pivot Rotation	Yes	
	Base	Detachable, ships detached	
Environmental	**Temperature – Operating**	46° to 95° F (10° to 35° C)	
	Temperature – Non-operating	6° to 140° F (-10° to 60° C)	
	Humidity – Operating	20% to 80% non-condensing	
	Humidity – Non-operating	5% to 85%	
	Altitude – Operating	+12,000 ft (+3,657.6 m)	
	Altitude – Non-operating	+40,000 ft (+12,192 m)	
Other	**Accessories Included**	VGA to DVI-I cable **–** connects the graphic	

		card's VGA connector to the monitor's input #2 (DVI-I analog) connector DVI-D to DVI-D cable – connects the graphic card's DVI-D digital connector to the monitor's input #2 (DVI-I digital) connector
	Software	Pivot Pro software from Portrait Displays, Inc. interacts with your PC's native graphics driver to enable seamless portrait screen redraws with a simple mouse-click or keyboard command. Pivot Pro supports 90-degree portrait and landscape views. Language support is available in English, Japanese, French, German, Spanish, Italian, and Traditional and Simplified Chinese. HP Display Assistant is a software utility that allows monitor adjustment, color calibration, and security/asset management using the Display Data Channel Command Interface (DDC/CI) protocol of the connected desktop PC. HP Display LiteSaver feature allows you to schedule Sleep mode at preset times to help protect the monitor against image retention, drastically lower power consumption and energy costs, and extend the lifespan of the monitor.
	User Guide Languages	English, B. Portuguese, French, LA Spanish, Korean, S. Chinese, T. Chinese, Bahasa, Japanese, Danish, Finnish, German, Norwegian, Spanish, Swedish, Greek, Polish, Russian, Slovenian, Turkish
	Warranty Languages	English, Canadian French, LA Spanish, Brazilian Portuguese, Danish, German, Castilian Spanish, French, Italian, Dutch, Norwegian, Finnish, Swedish, Bahasa Indonesian, Korean, T. Chinese, S. Chinese
	Color	Carbonite/silver
	VESA External Mounting	Yes (Standard 4 hole pattern, 100 mm)
	Kensington Lock-Ready	Yes
Options	**HP Silver Flat Panel Speaker Bar - Part number: EE418AA**	Powered directly by the monitor or PC, the Speaker Bar seamlessly attaches to the monitor's lower bezel to bring full audio support to select HP flat panel monitors. Features include dual speakers with full sound range and an external jack for headphones. Sold separately. For more information, refer to the HP Flat Panel Speaker Bar QuickSpec.

Technical Specifications - Monitors

Certification and Compliance	Australian ACA Approval, Canadian Requirements/CSA, CE Marking, China CCIB/CCEE Approval, CISPR Requirements, Eastern European Approvals, Energy Star Compliant, FCC Approval, German Ergonomic (TUV and GS Mark), ISO 9241-3,7,8 VDT Guidelines, ISO 13406-2 Pixel Defect Guidelines, Mexican NOM Approval, MIC Requirements (New Zealand), MPR-II Compliant, Nordic Approvals (Nemko, Fimko, Demko, Semko), PC2001 Compliant, PC99 Certified, S. Korean MIC Approval, Taiwan BSMI Approval, TCO 03 (emissions, ergonomics, environment), TUV-Ergo, UL Listed, VCCI Approvals, Microsoft Windows Certification (Microsoft Windows 98, Microsoft Windows 2000, and Microsoft Windows XP)
Compatibility	Compatible with platforms using the VESA standard video modes. Recommended for use with HP products.
Service and Warranty	Three years parts, labor, and on-site service. 24-hour, 90-day, toll-free technical support. Replacement options may include second business day on-site service, or next business day direct replacement, at HP's sole discretion. With direct replacement, HP will ship a replacement display product directly to you. Using the prepaid shipping labels provided, return your failed display to HP in the same packaging as the replacement. Certain restrictions and exclusions apply. For details see your product warranty or contact HP Customer Support.

© Copyright 2007 Hewlett-Packard Development Company, L.P.

All rights reserved. HP and the HP logo are trademarks of the Hewlett Packard Company in the U.S. and/or other countries.

Microsoft, Windows, Windows Vista, and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. NVIDIA and Quadro are trademarks of NVIDIA Corporation. All other product names mentioned herein may be trademarks of their respective companies.

HP shall not be liable for technical or editorial errors or omissions contained herein. The information is provided as is without warranty of any kind and is subject to change without notice. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty